

CDL2

A33

LED CANOPIES




Back view

TECHNICAL SPECIFICATIONS:

- :: Housing: Die-cast aluminum with prismatic polycarbonate lens redesigned for LED
- :: 1/2" threaded hubs located on two sides of the housing
- :: Voltage: 120~277V; 60Hz AC
- :: CRI: >80
- :: Power Factor: 90%
- :: Operating Temp: -40°F to 104°F

APPLICATIONS:

- :: Ideal for indoor parking lots, commercial buildings, schools, warehouses, retail centers, apartment complexes. Designed for 9 to 16-foot mounting

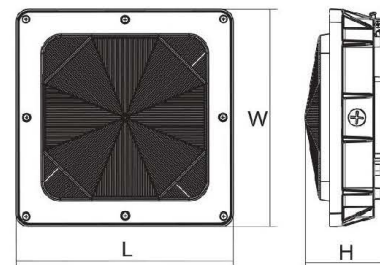

LED LOW PROFILE CANOPY/GARAGE LIGHT

CATALOG NO.	WATTS	LUMENS	COLOR TEMP	BEAM ANGLE	REPLACEMENT RANGE	DIMENSIONS
CDL2-45CW	45W	4400LM	5000K	150°	100~150 MH	10" (L) x 10" (W) x 8" (H)
CDL2-45NW	45W	4300LM	4000K	150°	100~150 MH	
CDL2-45WW	45W	4200LM	3000K	150°	100~150 MH	
CDL2-60CW	60W	7400LM	5000K	120°	150~200 MH	14" (L) x 14" (W) x 4" (H)
CDL2-60NW	60W	7100LM	4000K	120°	150~200 MH	
CDL2-60WW	60W	7100LM	3000K	120°	150~200 MH	
CDL2-80CW	80W	9700LM	5000K	120°	250~320 MH	
CDL2-80NW	80W	9700LM	4000K	120°	250~320 MH	
CDL2-80WW	80W	9700LM	3000K	120°	250~320 MH	

