

A47

CGL



Shown with side frosted lens

TECHNICAL SPECIFICATIONS:


- :: Housing: Die-cast aluminum with prismatic polycarbonate lens
- :: 1/2" threaded hubs located on two sides of the housing
- :: Voltage: 120-277V; 60Hz AC
- :: CRI: >80
- :: Power Factor: 90%
- :: Operating Temp: -4°F to 113°F
- :: 70,000 hour rated life
- :: Suitable for Wet Locations, IP65
- :: 7-year warranty

APPLICATIONS:

:: Ideal for indoor parking lots, commercial buildings, schools, warehouses, retail centers, apartment complexes. Designed for 9 to 16-foot mounting heights.



- OPTIONS**
- PHOTOCELL
 - MOTION SENSOR
 - BATTERY BACKUP

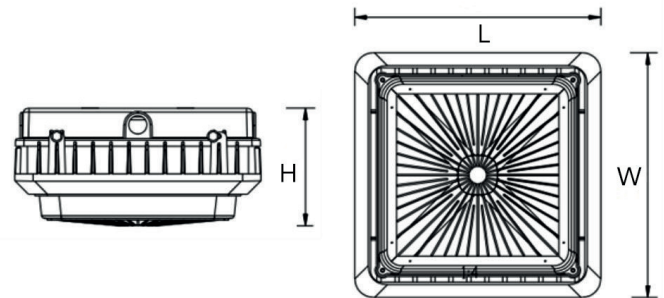

LED CANOPY/GARAGE LIGHT

CATALOG NO.	WATTS	LUMENS	COLOR TEMP	BEAM ANGLE	REPLACEMENT RANGE	DIMENSIONS
CGL-40W-50K	40W	5200LM	5000K	160°	100~150 MH	9" (L) x 9" (W) x 4-1/2" (H)
CGL-40W-40K	40W	5200LM	4000K	160°	100~150 MH	
CGL-55W-50K	55W	7100LM	5000K	160°	150~200 MH	
CGL-55W-40K	55W	7100LM	4000K	160°	150~200 MH	
CGL-75W-50K	75W	9700LM	5000K	160°	250~320 MH	10" (L) x 10" (W) x 5" (H)
CGL-75W-40K	75W	9700LM	4000K	160°	250~320 MH	
CGL-100W-50K	100W	13000LM	5000K	160°	350~400 MH	
CGL-100W-40K	100W	13000LM	4000K	160°	350~400 MH	
CGL-FL1	Side Frosted Lens for CGL-40W & 55W					
CGL-FL2	Side Frosted Lens for CGL-75W & 100W					