

CL A/C
(BALLAST
OVERRIDE)




TECHNICAL SPECIFICATIONS:

- :: Input voltage: 120~277V AC
- :: CCT: 3000K and 5000K
- :: CRI: 84
- :: Lamp base: E26 medium base (mogul base adaptors optional)
- :: Chip: Samsung LED chips with Rubycon driver
- :: Beam angle: 360°
- :: Operating Temp: 4°F~149°F

APPLICATIONS:

- :: Ideal for retrofitting existing HID highbay, shoebox, flood light or wall pack fixtures
- :: Can be used in enclosed luminaires

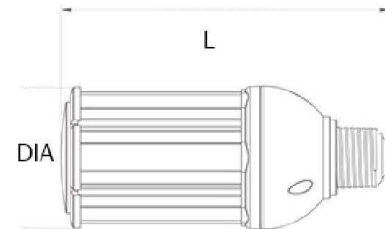

LED CORN LAMPS

CATALOG NO.	WATTS	BASE	LUMENS	COLOR TEMP	REPLACEMENT RANGE	DIMENSIONS
CL-18W-50K-E26	18W	E26	2450LM	5000K	50~100 MH	6-1/2" (L) x 2-3/4" (Dia)
CL-18W-30K-E26	18W	E26	2304LM	3000K	50~100 MH	
CL-36W-50K-E39	36W	E39	4788LM	5000K	70~150 MH	9-1/4" (L) x 3-3/4" (Dia)
CL-36W-30K-E39	36W	E39	4456LM	3000K	70~150 MH	
CL-45W-50K-E39	45W	E39	5985LM	5000K	100~175 MH	9-1/4" (L) x 3-3/4" (Dia)
CL-45W-30K-E39	45W	E39	5580LM	3000K	100~175 MH	

E26 MEDIUM BASE

ENLARGES E26 BULB TO BE USED IN E39 SOCKET

