


LED Commercial Recessed Light

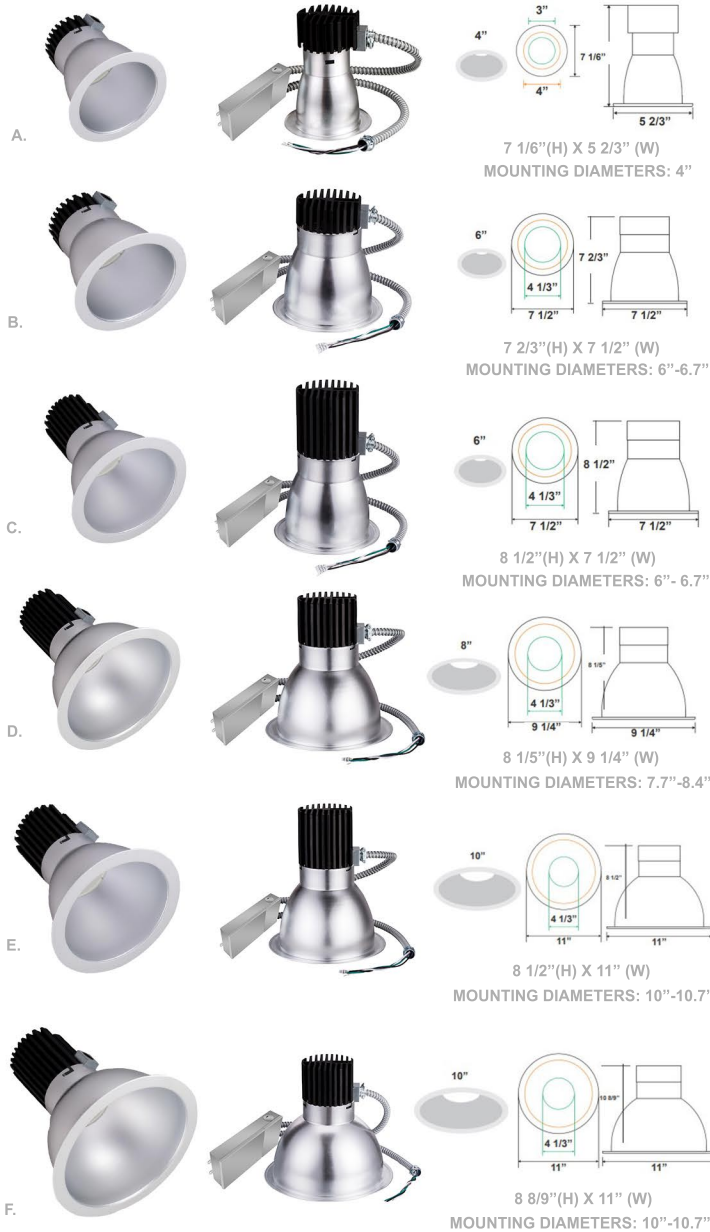

Wattage

14W / 18W / 20W / 27W
40W / 50W / 65W / 80W

Voltage Input

120-277VAC
50/60Hz

Efficacy

80-85 LPW


Dimming

0-10V Dimmable

Finish

6" / 8" / 10" Haze Finish Trim
Recessed Mounting

Color Temperatures

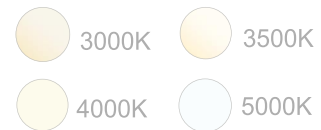

Features



Catalog No.	Fig.	Catalog No.	Fig.	Catalog No.	Fig.
CRLX4-14-27W-MCTP	A.	CRLX8-18-40W-MCTP	D.	CRLX10-50-80W-MP-30K	F.
CRLX6-18-40W-MCTP	B.	CRLX8-50-80W-MP-30K	D.	CRLX10-50-80W-MP-40K	F.
CRLX6-50-80W-MP-30K	C.	CRLX8-50-80W-MP-40K	D.	CRLX10-50-80W-MP-50K	F.
CRLX6-50-80W-MP-40K	C.	CRLX8-50-80W-MP-50K	D.		
CRLX6-50-80W-MP-50K	C.	CRLX10-18-40W-MCTP	E.		

Factory-Installed Options

Watts	EM Options	Description	Photocell	Description	Paint	Sensor	Description
ALL MODELS	OPT-EM-HB1EXT	EXTERNAL	N/A	N/A	N/A	N/A	N/A