

**20W INTEGRATED**




**ELB-2048-EXTR** is a CEC-Compliant, UL-Listed and approved for field installation emergency lighting system for fixtures with **Isolated** drivers. For use with LED modules driven by a constant current source. With an integrated battery and a test plate, it is a perfect choice for installation on panel lights and other commercial lights.

**Applications:**

- LED Flat panel lights
- Troffer fixtures
- Linear high bay fixtures (remove the test button and indicator light from the plate and install on the LED high bay fixture's end cap)
- UFO high bay fixtures
- Commercial recessed lights



15"x2.24"x1.3"(mounting center-14.4")

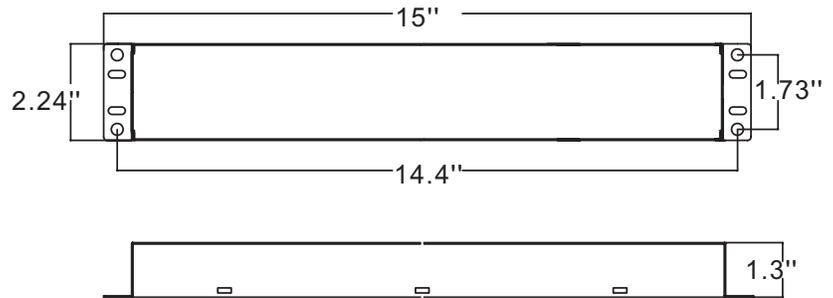

**ELB-2048-EXTR**

Input Voltage	120~277V AC, 50-60Hz
Input Current	65mA Max.
Input Power	5.5W Max.
Output Classification	Class II
Output Voltage	25-48V DC
Output Current	416-800mA
Output Power	10W / 15W / 20W Selectable
No Load Power Loss	≤ 0.5W
Surge Protection	L-N 1KV
Over Current Protection	Fuse
Emergency Duration	90 Minutes
Battery	Ni-MH (Nickel-Metal Hydride) / 4000mAh
Charging Time	≥ 24Hrs.
Operating Temperature	32°F ~ 122°F
Test Switch	Test Switch w/ Integrated Indicator Light
Weight	3.2 lbs.
Cable Length	17.7" Flexible Conduit

