



LED 5CCT Cloud Fixtures

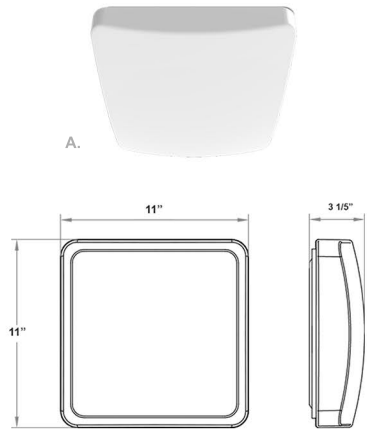

11"(W) x 3 1/5"(D)

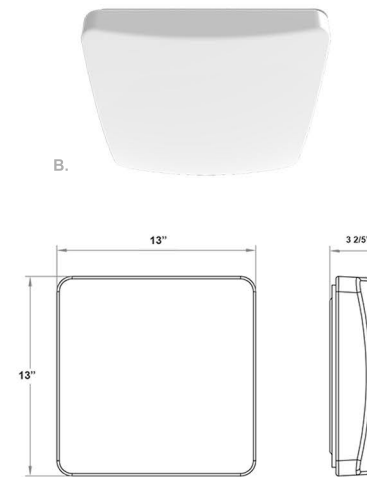


13"(W) x 3 1/2"(D)

Wattage

20W / 24W

Voltage Input120V AC
60Hz**Efficacy**

75 LPW

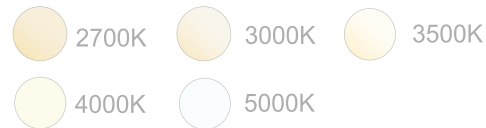DimmingDimmable Down to 10% Using Standard TRIAC
LED Dimmer**Finish**White Translucent Acrylic Lens
Spun Aluminum Steel
Brushed Nickel Finish**Color Temperatures****Features****Factory-Installed Options**

Catalog No.	Fig.
FCS-11HL-MCT5	A.
FCS-13-MCT5	B.

Watts	EM Option	Description	Photocell	Description	Paint	Sensor	Description
FCR-11	OPT-EM-FCR11	INTERNAL	OPT-PC-FM	BUTTON W/ AUXILIARY BASE	N/A	OPT-SEN-2US INTERNAL FOR ALL MODELS	ULTRASONIC BI-LEVEL DIMMING (REMOTE NOT NEEDED)
FCR-14	OPT-EM-FCR14	INTERNAL					
FCR11, FCS11HL	OPT-EM-FCS11	INTERNAL	277V Option			OPT-SEN-2USRC	REMOTE CONTROL
FCS14	OPT-EM-FCS14	INTERNAL	OPT-277V-FCR-11	EXTERNAL BOX			
FS13	OPT-EM-FCS13	INTERNAL	OPT-277V-FCS-11	EXTERNAL BOX			
			OPT-277V-FCS-11HL	EXTERNAL BOX			
			OPT-277V-FCS-13	EXTERNAL BOX			

WESTGATE MFG
 Order at:
 TEL: 877.805.2252 FAX: 877.809.2252
 ORDERS@WESTGATEMFG.COM