

FLD2

120~277V

TECHNICAL SPECIFICATIONS:


- :: Westgate's powerful bullets
- :: LED: LUMILEDS
- :: Optical Lens: High transmittance PC, anti-UV and fire resistant
- :: Cord type: 18" SJTW 18/3 AWG cable
- :: 60° beam angle
- :: Housing: Cast aluminum with powder coat finish (Bronze)
- :: 1/2" hole on bracket for mounting with LF-THREAD (see accessories) or other strain-relief connectors
- :: Voltage: 120~277V AC, 50/60Hz
- :: Operating Temp: -40°F to 104°F
- :: CRI: >80
- :: Power Factor: >0.9
- :: Maintenance free
- :: 70,000 hour rated life
- :: 7-year warranty
- :: Suitable for Wet Locations, IP65

APPLICATIONS:

- :: Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas.
- :: Replace existing HID flood lights/ wall packs
- :: Great for use with motion sensors or other instant on/off controls



See page A51 for shrouds

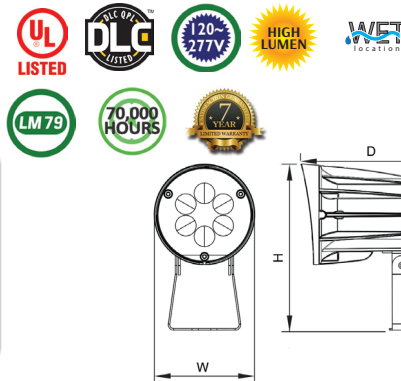

LED BULLET FLOOD LIGHTS WITH TRUNNION

CATALOG NO.	WATTS	LUMENS	COLOR TEMP	REPLACEMENT RANGE	DIMENSIONS
FLD2-15CW-TR	15W	1650LM	5000K	50~70 MH	3"(W) x 5-1/2"(H) x 4-1/4"(D)
FLD2-15WW-TR	15W	1530LM	3000K	50~70 MH	3"(W) x 5-1/2"(H) x 4-1/4"(D)
FLD2-28CW-TR	28W	3000LM	5000K	70~100 MH	4"(W) x 7-1/2"(H) x 5-3/4"(D)
FLD2-28WW-TR	28W	2760LM	3000K	70~100 MH	4"(W) x 7-1/2"(H) x 5-3/4"(D)
FLD2-42CW-TR	42W	4500LM	5000K	100~175 MH	4-1/2"(W) x 8"(H) x 6-1/4"(D)
FLD2-42WW-TR	42W	4200LM	3000K	100~175 MH	4-1/2"(W) x 8"(H) x 6-1/4"(D)
FLD2-50CW-TR	50W	5200LM	5000K	175~225 MH	5.4"(W) x 8.8"(H) x 8.14"(D)
FLD2-50WW-TR	50W	5000LM	3000K	175~225 MH	5.4"(W) x 8.8"(H) x 8.14"(D)