


# Post Disk Light with Single Arm



POLE IS NOT INCLUDED

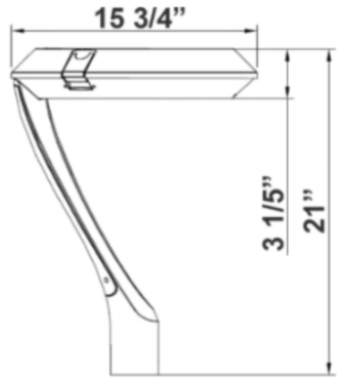

15 3/4"(W) x 21"(H)  
Inside Diameter: 2 3/4"

### Wattage

18W / 30W / 45W / 60W

### Voltage Input

100-277V AC 50/60z

### Efficacy

150 LM/W

### Dimming

0-10V Dimming

### Finish

Die-cast Aluminum Housing with Powder Coat Finish

### Beam Angles

Type V (150° x 150°)

### Color Temperatures

3000K 4000K 5000K

### Features



### Factory-Installed Options

Catalog No.	Fig.	Watts	EM Options	Description	Photocell	Description	Paint	Sensor	Description
GPX-18-60W-MCTP-A1	A.		OPT-EM-0D2INT	INTERNAL	OPT-3MPC	ELECTRONIC	OPT-CLR-95(BK/GR/SR/WH)	OPT-SEN-3MR-3	PROGRAMMABLE MICROWAVE (BI-LEVEL)
								WEC-8RC	REMOTE CONTROL