

LF3-480V



LF3-220-480V-YK
LF3-300-480V-YK




LF3-150-480V-YK

TECHNICAL SPECIFICATIONS:

- :: Mounting yoke included in the package - not mounted
- :: Housing: Die-cast aluminum housing with powder coat finish (Dark Bronze)
- :: Voltage: 347~480V
- :: 0~10V dimming (except 80W)
- :: Type II lens (TYPE III & IV by request)
- :: 6" SJTW 18/3 AWG cable
- :: Power Factor: .9~.97
- :: Operating Temp:-4°F to 104°F
- :: Up to 110 lumens per watt
- :: CRI: 82~84
- :: 70,000 hour rated life
- :: Suitable for Wet Locations, IP65

APPLICATIONS:

- :: Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas.
- :: Great for use with motion sensors or other instant on/off controls

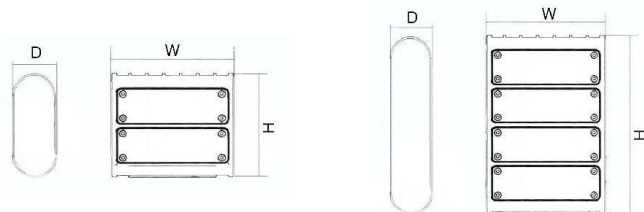

LF3 FLOOD LIGHT SERIES WITH MOUNTING OPTIONS(347V-480V)

CATALOG NO.	WATTS	LUMENS	COLOR TEMP	REPLACEMENT RANGE	DIMENSIONS
LF3-150CW-480V-YK	150W	18000LM	5000K	320~400 MH	12-1/2"(W) x 9-3/4"(H) x 2-1/2"(D)
LF3-220CW-480V-YK	220W	25000LM	5000K	350~400 MH	12-1/2"(W) x 17"(H) x 2-3/4"(D)
LF3-300CW-480V-YK	300W	34017LM	5000K	1000 MH	
LF3-PK	Photocell Kit for LF3 series, Field installed				

Optional mounts - Field installed, must be ordered separately



LF3-EXTARM
Extension arm
(4" wide to fit 4" pole)



LF3-STR
Street light arm
(6" long to fit 2"-2-1/2" pipe)

Includes strain relief connector



LF3-PK
Photocell Kit for
LF3 80W, 100W & 150W
field installed



LF3-YOK
Included in the box
Not used when other mounting options ordered

Ordering example: LF3-220CW-480V-YK + LF3-EXTARM

