


**LF3** WITH MOUNTING OPTIONS



LF3-220-YK  
LF3-300-YK

LF3-80-YK  
LF3-100-YK  
LF3-150-YK

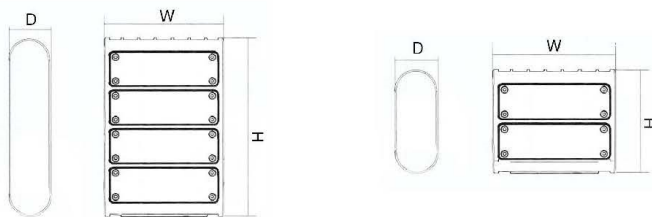

**TECHNICAL SPECIFICATIONS:**

- :: Mounting yoke included in the package - not mounted
- :: Housing: Die-cast aluminum housing with powder coat finish (Dark Bronze)
- :: Voltage: 120~277V; 60Hz AC
- :: Cord type:
- :: 0~10V dimming (except 80W)
- :: Type II lens (TYPE III & IV by request)
- :: 6" SJTW 18/3 AWG cable
- :: Power Factor: .9~.97
- :: Operating Temp: -4°F to 104°F
- :: Up to 110 lumens per watt
- :: CRI: 82~84
- :: 70,000 hour rated life
- :: Suitable for Wet Locations, IP65

**APPLICATIONS:**

- :: Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas.
- :: Great for use with motion sensors or other instant on/off controls



**LF3 FLOOD LIGHT SERIES WITHOUT MOUNTING (120V-277V)**

CATALOG NO.	WATTS	LUMENS	COLOR TEMP	REPLACEMENT RANGE	DIMENSIONS
LF3-80CW-YK	80W	9800LM	5000K	150~250 MH	12-1/2"(W) x 9-3/4"(H) x 2-1/2"(D)
LF3-80WW-YK	80W	9600LM	3000K	150~250 MH	
LF3-100CW-YK	100W	11500LM	5000K	200~400 MH	
LF3-100WW-YK	100W	10000LM	3000K	200~400 MH	
LF3-150CW-YK	150W	18000LM	5000K	320~400 MH	12-1/2"(W) x 17"(H) x 2-3/4"(D)
LF3-150WW-YK	150W	15500LM	3000K	320~400 MH	
LF3-220CW-YK	220W	25000LM	5000K	350~400 MH	
LF3-220WW-YK	220W	22000LM	3000K	350~400 MH	
LF3-300CW-YK	300W	33000LM	5000K	1000 MH	1000 MH
LF3-300WW-YK	300W	30800LM	3000K	1000 MH	

LF3-PK

Photocell Kit for LF3 series, Field installed

Optional mounts - Field installed, must be ordered separately



**LF3-EXTARM**  
Extension arm  
(4" wide to fit 4" pole)



**LF3-STR**  
Street light arm  
(6" long to fit 2"-2-1/2" pipe)



**LF3-PK**  
Photocell Kit for  
LF3 80W, 100W & 150W  
Field installed



**LF3-YOK**  
Included in the box  
Not used when other mounting options ordered

Ordering example: LF3-220CW-YK + LF3-EXTARM

