

# LF4-SF



LF4-80W-SF  
LF4-100W-SF



LF4-150W-SF




BACK VIEW

### TECHNICAL SPECIFICATIONS:

- :: Housing: Die-cast aluminum housing with powder coat finish (Dark Bronze)
- :: Voltage: 120~277V; 60Hz AC
- :: 0~10V dimming
- :: TIR optic lens - TYPE II
- :: 13" #18 AWG stranded wires
- :: Power Factor: .9~.97
- :: Operating Temp: -4°F to 104°F
- :: Up to 110 lumens per watt
- :: CRI: 82~84
- :: 70,000 hour rated life
- :: Suitable for Wet Locations, IP65

### APPLICATIONS:

- :: Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas.
- :: Great for use with motion sensors or other instant on/off controls

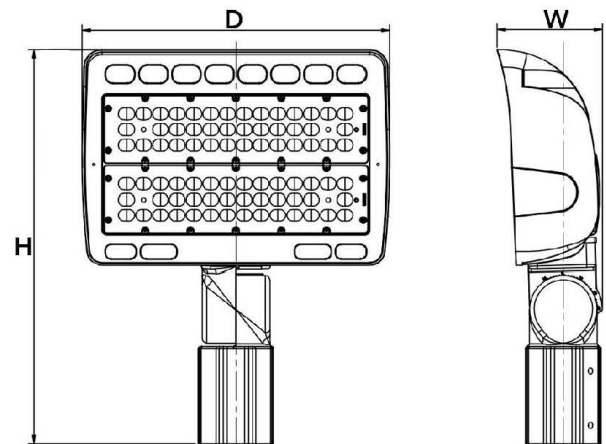

## LF4 ARCHITECTURAL SERIES WITH SLIP FITTER (120V-277V)

CATALOG NO.	WATTS	LUMENS	COLOR TEMP	REPLACEMENT RANGE	DIMENSIONS
LF4-80CW-SF	80W	9500LM	5000K	150~250 MH	11.8"(H) x 10.9"(W) x 8.4"(D)
LF4-80WW-SF	80W	9500LM	3000K	150~250 MH	
LF4-100CW-SF	100W	11200LM	5000K	200~400 MH	
LF4-100WW-SF	100W	11200LM	3000K	200~400 MH	
LF4-150CW-SF	150W	17000LM	5000K	320~400 MH	17"(H) x 13.3"(W) x 9.3"(D)
LF4-150WW-SF	150W	17000LM	3000K	320~400 MH	

