


# Adjustable Compact Linear Highbay




A.

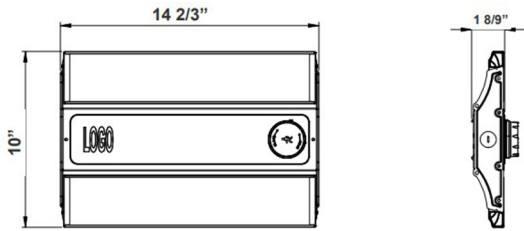

10"(H) X 14 2/3"(W) X 1 8/9"(D)



B.

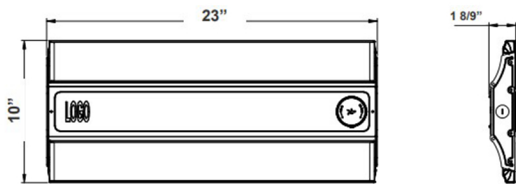

10"(H) X 23"(W) X 1 8/9"(D)

### Wattage

80W / 110W / 150W / 165W / 190W / 220W

### Voltage Input

120-277V AC / 50~60 Hz

### Efficacy

150 LM/W

### Dimming

0~10V Dimmable

### Finish

Steel Housing

### Color Temperatures



### Features



### Adjustable Lens



45° Max Adjustable Lens

Catalog No.	Fig.
LLHC-80-150W-MCTP	A.
LLHC-165-220W-MCTP	A.

### Factory-Installed Options

Watts	EM Options	Description	Plug-In Cord	Description	Paint	Sensor	Description
ALL	OPT-EM-LLHC	EXTERNAL	OPT-HBC-125TL-WH	8FT, 15A, 125V, WHITE	N/A	OPT-SEN-3MR-3-WH	MICROWAVE BI-LEVEL
			OPT-HBC-277TL-WH	8FT, 15A, 277V, WHITE		WEC-8RC	REMOTE CONTROL
			OPT-HBC-125SB-WH	10FT, 15A, 125V, 18/3STR, WHT			