


LED Linear Vapor Lights

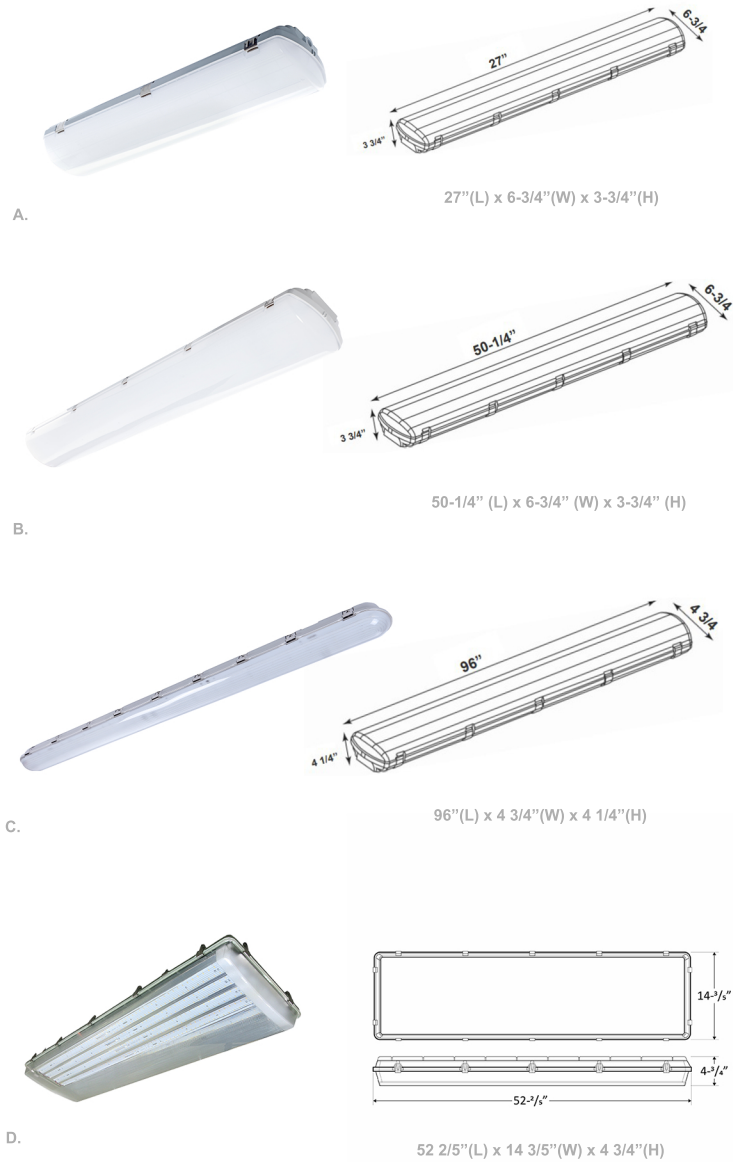

Wattage

25W / 36W / 40W / 46W / 65W / 75W / 80W
100W / 110W / 120W / 135W / 150W / 155W

Voltage Input

120-277V AC / 50~60 Hz

Efficacy

119-130 LPW


Dimming

0~10V Dimmable

Finish

Polycarbonate Housing
Grey Finish

Color Temperatures



Features



Catalog No.	Fig.	Catalog No.	Fig.	Catalog No.	Fig.
LLVT-2FT-25W-MCT-D	A	LLVT-4FT-150W-MCT-D	D	LLVT-4FT-40W-MCT-D-480V	B
LLVT-4FT-40W-MCT-D	B	LLVT-4FT-150W-MCTP-D	D	LLVT-4FT-75W-MCT-D-480V	B
LLVT-4FT-75W-MCT-D	A	LLVT-2FT-65W-MCT-D	C	LLVT-4FT-100W-MCT-D-480V	D
LLVT-2FT-36W-MCT-D	A	LLVT-8FT-65W-40K-D	C	LLVT-4FT-150W-MCT-D-480V	D
LLVT-2FT-46W-MCT-D	A	LLVT-8FT-65W-50K-D	C	LLVT-8FT-65W-40K-D-480V	C
LLVT-4FT-100W-40K-D	B	LLVT-8FT-100W-40K-D	C	LLVT-8FT-65W-50K-D-480V	C
LLVT-4FT-100W-MCT-D	B	LLVT-8FT-100W-50K-D	C	LLVT-8FT-100W-40K-D-480V	A
LLVT-4FT-150W-50K-D	C	LNVT-4FT-155W-MCTP-D	D	LLVT-8FT-100W-50K-D-480V	C

Factory-Installed Options

Watts	EM Options	Description	Plug-In Cord	Description	Paint	Sensor	Description
25W to 46W	OPT-EM-CM1INT	INTERNAL	OPT-HBC-125TL-WH	8FT,15A,125V,WHITE	N/A	OPT-SEN-2MDR-36	PROGRAMMABLE MICROWAVE (B-L-LEVEL)
65W to 155W	OPT-EM-CM2INT	INTERNAL	OPT-HBC-277TL-WH	8FT,15A,277V,WHITE	N/A	WEC-3RC	OPTIONAL RC
	Surge Protector	Description	OPT-HBC-125SB-WH	10FT,15A,125V,18/3STR,WHT			
	OPT-SP-10KV	120V		Photocell	Description		
	OPT-SP-10KV-480V	480V	OPT-PC-B	BUTTON			