
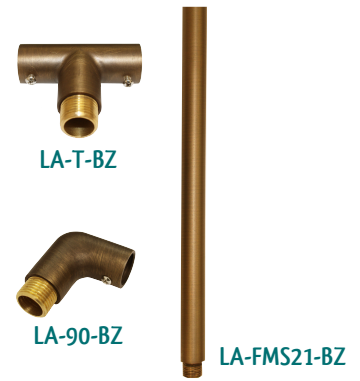


:: Catalog No.	:: Description	:: Note
<p>LOW-VOLTAGE CABLE</p>  <p>LOV-14 LOV-12 LOV-10 LOV-8</p>	<p>Cat No.:</p> <p>LOV-14: #14 AWG (41 Strands) LOV-12: #12 AWG (65 Strands) LOV-10: #10 AWG (104 Strands) LOV-8: #8 AWG (168 Strands)</p> <p>500 Ft. Low-Voltage underground cable.</p> <ul style="list-style-type: none"> Operating temp: -4°F to 140°F Suitable for outdoor lighting not exceeding 150V. RoHS Compliant 	 <p>Black PVC Insulation Jacket</p>
<p>SILICON-FILLED WIRE NUTS BAG OF 24</p>  <p>LSWN1 LSWN2</p>	<p>Cat No.:</p> <p>LSWN1: Bag of 24 silicon-filled waterproof wire connectors, for up to two 14-2 + one 16-2 cables</p> <p>LSWN2: Box of 24 silicon-filled waterproof wire connectors, for up to three 12-2 cables</p>	
<p>SPIKES</p>  <p>WL-SLEEVE SPIKE-BG SPIKE-10</p>	<p>Cat No.:</p> <p>SPIKE-BG: 8.5" PVC Spike</p> <p>SPIKE-10: 10" PVC Spike</p> <p>WL-SLEEVE: PVC Sleeve Kit for 4" Well Lights.</p>	
<p>PATH LIGHTING ACCESSORIES</p>  <p>LA-T-BZ LA-90-BZ LA-FMS21-BZ</p>	<p>Cat No.:</p> <p>LA-FMS21-BZ: 21" Solid brass fixture mounting stem Antique bronze finish</p> <p>LA-T-BZ: Fixture mounting "T" attachment</p> <p>LA-90-BZ: Fixture mounting 90° elbow attachment</p> <p>Sample path light assembly shown with Westgate model LD-006-BZ (not included). Order your choice of fixture(s) separately. Use with plastic spikes included with 12V fixtures; or, order your choice of ground or surface mounting.</p>	 <p>Sample Installation with LD-006-BZ (not included)</p>

D47