

LR-ECO




with Photocell



LR-ECO-ARM
Optional 90° Arm

TECHNICAL SPECIFICATIONS:

- :: Die-cast aluminum with powder coat finish (Dark Bronze)
- :: Optional 90° Arm (1-1/4" EMT Elbow)
- :: Polycarbonate lens
- :: Driver located in isolated compartment for improved thermal management
- :: Beam Angle: 90°
- :: UL listed photocell
- :: CRI: >80
- :: 50,000 hour rated life
- :: 7-year warranty
- :: Suitable for Wet Locations, IP65

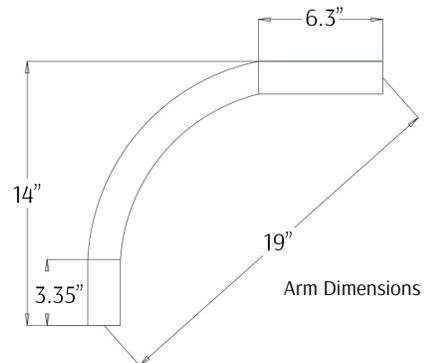

LED BARN LIGHTS WITH PHOTOCELL

| CATALOG NO. | WATTS | LUMENS | COLOR TEMP | BEAM ANGLE | REPLACEMENT RANGE | DIMENSIONS |
|------------------|--|--------|------------|------------|-------------------|----------------------------|
| LR-ECO-20W-50K-P | 20W | 2400LM | 5000K | 90° | 70-100 MH | 10.5"(L) x 7"(W) x 5.6"(H) |
| LR-ECO-20W-30K-P | 20W | 2400LM | 3000K | 90° | 70-100 MH | |
| LR-ECO-ARM | 90° Arm for LR-ECO series, Mounting Strap included | | | | | |