


Model G & H Architectural LED Wall Lights

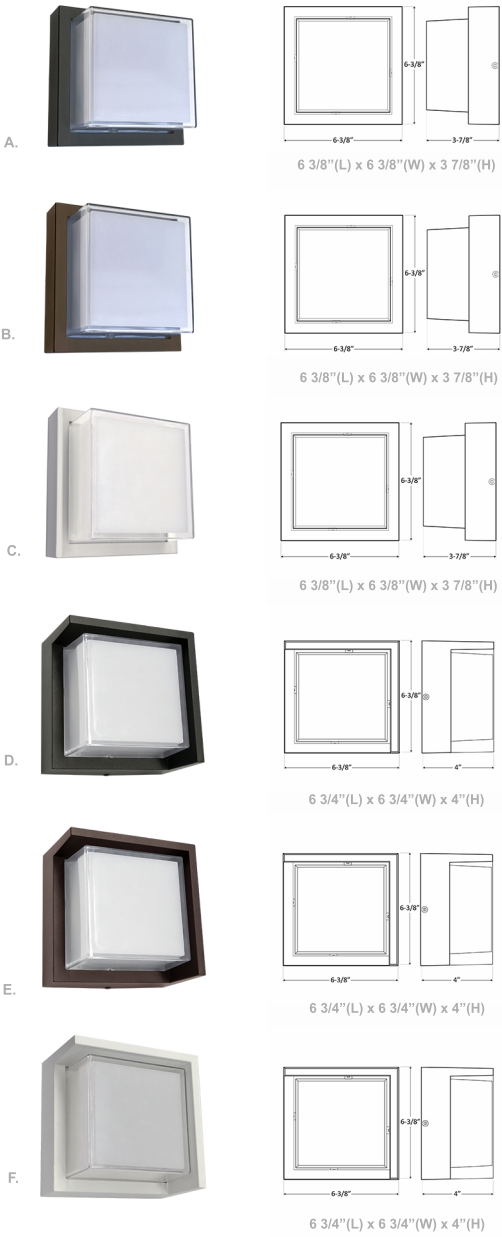

Wattage

12W

Voltage Input

120V AC 60Hz

Efficacy

54 LPW

Dimming

0~10V Dimmable

Finish

Back Plate: Die-Cast Aluminum with Mounting/Gasket
Black / White / Marine Grade Bronze


Color Temperatures



Features



Beam Angle



Catalog No.	Fig.	Catalog No.	Fig.
LRS-G-MCT-C90-BK	A.	LRS-H-MCT-C90-BK	D.
LRS-G-MCT-C90-MGBR	B.	LRS-H-MCT-C90-MGBR	E.
LRS-G-MCT-C90-WH	C.	LRS-H-MCT-C90-WH	F.

Factory-Installed Options

Watts	EM Options	Description	Protocol	Description	Paint	Sensor	Description
LRS-E/LRS-F	OPT-EM-LRS-R	BACK BOX	OPT-277V-LRS-R	EXTERNAL BOX	N/A	N/A	N/A
LRS-G/LRS-H/LRS-J/LRS-J1S	OPT-EM-LRS-S	BACK BOX	OPT-277V-LRS-S	EXTERNAL BOX	N/A	N/A	N/A