


Selectable Color Temp. & Wattage Troffers




A.



23 3/4" (L) x 23 3/4" (W) x 2 1/2" (H)




B.

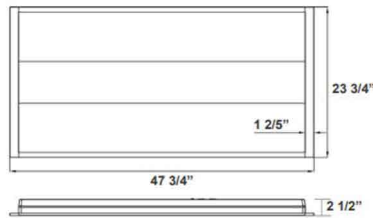

47 3/4" (L) x 23 3/4" (W) x 2 1/2" (H)



C.

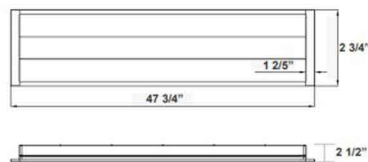

12 3/4" x 47 3/4" x 2 1/2"

Wattage

26W / 32W / 40W / 50W

Voltage Input

120-277VAC 50/60Hz

Efficacy

125 LPW

Dimming

0~10V Dimming

Finish

Cold-Rolled Steel
White Finish

Color Temperatures



Features



Accessory



LTRÉ-SMK
Surface Mounting Kit



Factory-Installed Options

Watts	EM Options	Description	Flex Whip	Description	Paint	Sensor	Description
ALL MODELS	OPT-EM-LTRÉ	MOUNTED ON TOP	OPT-FWH-63	6FT 3-WIRE WHIP	N/A	OPT-SEN-2MDR-36	PROGRAMMABLE MICROWAVE BI-LEVEL
	Ribbed Lens	Description	OPT-FWH-65	6FT 5-WIRE WHIP	N/A	WEC-3RC	REMOTE CONTROL
	OPT-2X2-RL	RIBBED LENS FOR 2X2	OPT-FWH-66	6FT 6-WIRE WHIP	N/A		
	OPT-2X4-RL	RIBBED LENS FOR 2X4					

Catalog No.	Fig.
LTRÉ-2X2-MCTP	A.
LTRÉ-2X4-MCTP	B.
LTRÉ-1X4-MCTP	C.