

A5

LWP2




TECHNICAL SPECIFICATIONS:

- :: Full cutoff, dark sky compliant
- :: Die-cast aluminum with powder coat finish (Dark Bronze)
- :: Philips Lumileds Lexeon 3030 high flux LED
- :: Polycarbonate Optic Lens
- :: Voltage: 120-277V
- :: Includes mounting hardware
- :: Redesigned for high-performance LED
- :: CRI: >80
- :: Power Factor: 95%
- :: Operating Temp: -4°F to 104°F
- :: 70,000 hour rated life
- :: 7-year warranty
- :: Suitable for Wet Locations, IP54

APPLICATIONS:

- :: Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas.
- :: Replace existing HID flood lights/ wall packs
- :: Great for use with motion sensors or other instant on/off controls

OPTIONS
PHOTOCELL
MOTION SENSOR
BATTERY BACKUP
FIXTURE COLOR

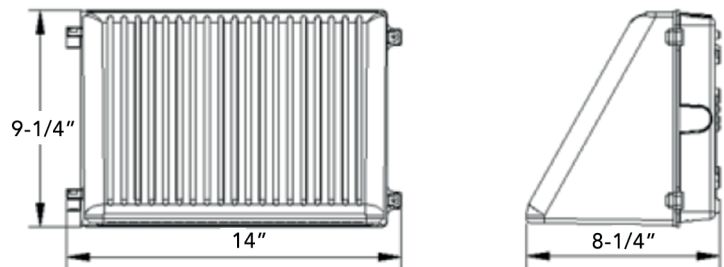

LED FULL CUTOFF WALL PACKS

CATALOG NO.	WATTS	LUMENS	COLOR TEMP	REPLACEMENT RANGE	DIMENSIONS
LWP2-50CW	50W	5500LM	5000K	175~250 MH	14" (W) x 9-1/4" (H) x 8-1/4" (D)
LWP2-50NW	50W	5500LM	4000K	175~250 MH	
LWP2-50WW	50W	5000LM	3000K	175~250 MH	
LWP2-80CW	80W	9000LM	5000K	320~400 MH	
LWP2-80NW	80W	9000LM	4000K	320~400 MH	
LWP2-80WW	80W	8000LM	3000K	320~400 MH	