

# SCX-DL

**MCT4**

## TECHNICAL SPECIFICATIONS:

- :: MCT: Multi Color Temperature (Selectable Switch Inside Fixture)
- :: Aluminum Housing With Matte White Finish
- :: Drop Lens
- :: Beam Angle: 104.8°(H) x 100.5°(V)
- :: Voltage: 120-277V AC 50/60Hz
- :: Dimmable: 0~10V dimmable
- :: CRI:>80
- :: Power Factor:>0.95
- :: Ambient Temperature: -13°F~104°F
- :: Life Span: 50,000 hours
- :: IP Rating: IP54
- :: 5-year warranty



B13

### Optional Accessories (See Page B37)






6 Ft. Cord  
SJTW 18 AWG 5-Conductor  
(Not Included)



Adj. 6FT 1/16in Single Suspension  
Canopy Set With Keyhole End  
Connector, Power Side With SJTW18/5  
White Core

**OPTIONS**

- DAYLIGHT HARVESTING
- MOTION SENSOR
- BATTERY BACKUP
- FIXTURE COLOR

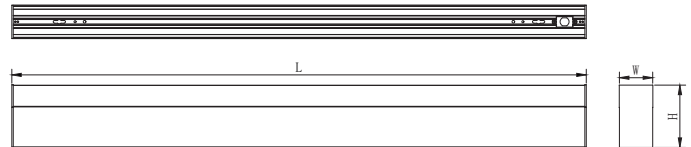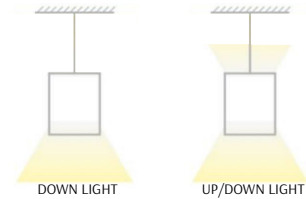

Recessed Mounted  
(Flanged)




Surface Mounted




Wall Mounted




Suspended

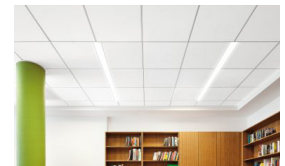

T-Bar Installation

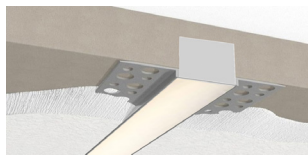

Flangless Recessed Mounted  
(Mud-In)



Color of Your Choice

## LED SUPERIOR ARCHITECTURAL LIGHTS W/ DROP LENS

CATALOG NO.	WATTS	LPW	COLOR TEMP	DIMENSIONS
SCX-2FT-20W-MCT4-D-DL	20W	111LM/W	3000K/3500K/4000K/5000K	24"(L) x 2 3/4"(W) x 3 3/5"(H)
SCX-3FT-30W-MCT4-D-DL	30W	112LM/W	3000K/3500K/4000K/5000K	35 3/5"(L) x 2 3/4"(W) x 5 2/5"(H)
SCX-4FT-40W-MCT4-D-DL	40W	117LM/W	3000K/3500K/4000K/5000K	47 2/5"(L) x 2 3/4"(W) x 5 1/5"(H)
SCX-6FT-60W-MCT4-D-DL	60W	112LM/W	3000K/3500K/4000K/5000K	70"(L) x 2 3/4"(W) x 3 2/5"(H)
SCX-8FT-80W-MCT4-D-DL	80W	117LM/W	3000K/3500K/4000K/5000K	94 2/5"(L) x 2 3/4"(W) x 5 2/5"(H)