

SCX-DLP

MCT4




TECHNICAL SPECIFICATIONS:

- :: MCT: Multi Color Temperature (Selectable Switch Inside Fixture)
- :: Aluminum Housing With Matte White Finish
- :: PMMA LENS
- :: Beam Angle: 104.8°(H) x 100.5°(V)
- :: Voltage: 120-277V AC 50/60Hz
- :: Dimmable: 0~10V dimmable
- :: CRI:>80
- :: Power Factor:>0.95
- :: Ambient Temperature: -13°F~104°F
- :: Life Span: 50,000 hours
- :: IP Rating: IP54
- :: 5-year warranty

B14



- OPTIONS**
- DAYLIGHT HARVESTING
 - MOTION SENSOR
 - BATTERY BACKUP
 - FIXTURE COLOR

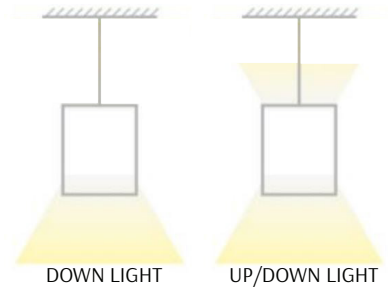



Optional Accessories (See Page B37)



6 Ft. Cord
SJTW 18 AWG 5-Conductor
(Not Included)



Adj. 6FT 1/16in Single Suspension
Canopy Set With Keyhole End
Connector, Power Side With SJTW18/5
White Core

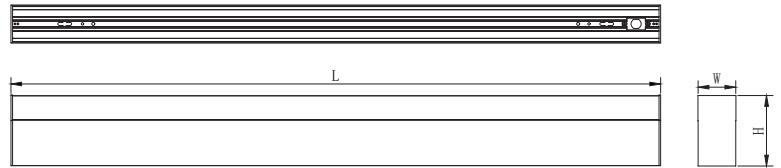


Recessed Mounted
(Flanged)




Surface Mounted




Wall Mounted




Suspended



T-Bar Installation



Flangless Recessed Mounted
(Mud-In)



Color of Your Choice

LED SUPERIOR ARCHITECTURAL LIGHTS PMMA LENS

CATALOG NO.	WATTS	LPW	COLOR TEMP	DIMENSIONS
SCX-2FT-20W-MCT4-D-DLP	20W	111LM/W	3000K/3500K/4000K/5000K	24"(L) x 2 6/8"(W) x 3 3/8"(H)
SCX-4FT-40W-MCT4-D-DLP	40W	117LM/W	3000K/3500K/4000K/5000K	47 2/5"(L) x 2 6/8"(W) x 3 3/8"(H)