

# SCX-IND

**MCT4**

B13



**TECHNICAL SPECIFICATIONS:**

- :: MCT: Multi Color Temperature (Selectable Switch Inside Fixture)
- :: Aluminum Housing With Matte White Finish
- :: Opal Polycarbonate Lens-Indirect Lighting
- :: Beam Angle: 104.8°(H) x 100.5°(V)
- :: Voltage: 120-277V AC 50/60Hz
- :: Dimmable: 0~10V dimmable
- :: CRI:>80
- :: Power Factor:>0.95
- :: Ambient Temperature: -13°F~104°F
- :: Life Span: 50,000 hours
- :: IP Rating: IP54
- :: 5-year warranty



**Optional Accessories (See Page B37)**




6 Ft. Cord  
SJTW 18 AWG 5-Conductor  
(Not Included)




Adj. 6FT 1/16in Single Suspension  
Canopy Set With Keyhole End  
Connector, Power Side With SJTW18/5  
White Core




- OPTIONS**
- DAYLIGHT HARVESTING
  - MOTION SENSOR
  - BATTERY BACKUP
  - FIXTURE COLOR



UP LIGHT

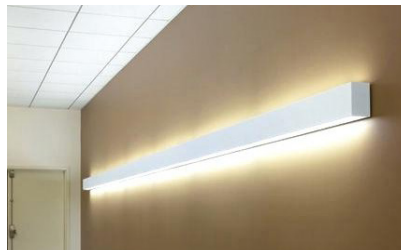

Wall Mounted

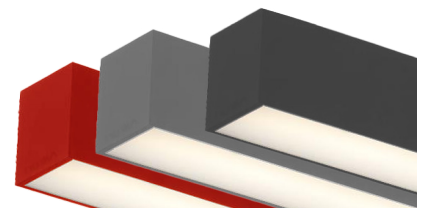

Color of Your Choice

## LED SUPERIOR ARCHITECTURAL INDIRECT LIGHTS

CATALOG NO.	WATTS	LPW	COLOR TEMP	DIMENSIONS
SCX-2FT-20W-MCT4-D-IND	20W	120LM/W	3000K/3500K/4000K/5000K	24"(L) x 2 6/8"(W) x 3 3/8"(H)
SCX-3FT-30W-MCT4-D-IND	30W	118LM/W	3000K/3500K/4000K/5000K	35 3/4"(L) x 2 6/8"(W) x 3 3/8"(H)
SCX-4FT-40W-MCT4-D-IND	40W	118LM/W	3000K/3500K/4000K/5000K	47 2/5"(L) x 2 6/8"(W) x 3 3/8"(H)
SCX-6FT-60W-MCT4-D-IND	60W	118LM/W	3000K/3500K/4000K/5000K	71"(L) x 2 6/8"(W) x 3 3/8"(H)
SCX-8FT-80W-MCT4-D-IND	80W	118LM/W	3000K/3500K/4000K/5000K	94 1/2"(L) x 2 6/8"(W) x 3 3/8"(H)