

# SCX4

MCT<sup>4</sup>

B13




**TECHNICAL SPECIFICATIONS:**



- :: MCT: Multi Color Temperature (Selectable Switch Inside Fixture)
- :: Seamless Linkable Linear Lighting System
- :: Aluminum Housing With Matte White Finish
- :: Opal Polycarbonate Lens-Direct (UP) Lighting
- :: Beam Angle: 104.8°(H) x 100.5°(V)
- :: Voltage: 120-277V AC 50/60Hz
- :: Dimmable: 0~10V dimmable
- :: CRI:>80
- :: Power Factor:>0.95
- :: Ambient Temperature: -13°F~104°F
- :: Life Span: 50,000 hours
- :: IP Rating: IP54
- :: 5-year warranty



**Optional Accessories (See Page B37)**




- OPTIONS**
- DAYLIGHT HARVESTING
  - MOTION SENSOR
  - BATTERY BACKUP
  - FIXTURE COLOR

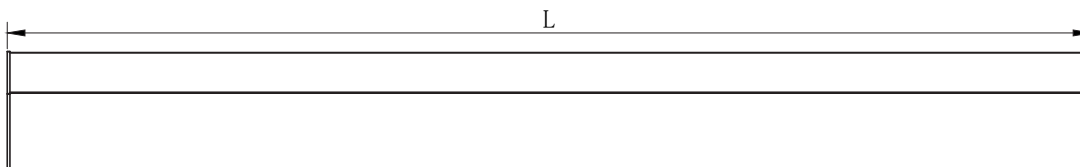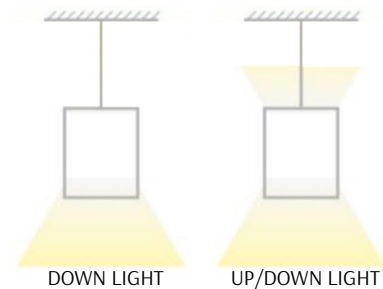

## LED SUPERIOR ARCHITECTURAL LIGHTS (4" WIDE)

CATALOG NO.	WATTS	LPW	COLOR TEMP	DIMENSIONS
SCX4-2FT-20W-MCT4-D	20W	107LM/W	3000K/3500K/4000K/5000K	24"(L) x 4"(W) x 3 3/8"(H)
SCX4-3FT-30W-MCT4-D	30W	113LM/W	3000K/3500K/4000K/5000K	35 3/4"(L) x 4"(W) x 3 3/8"(H)
SCX4-4FT-40W-MCT4-D	40W	115LM/W	3000K/3500K/4000K/5000K	47 2/5"(L) x 4"(W) x 3 3/8"(H)
SCX4-6FT-60W-MCT4-D	60W	120LM/W	3000K/3500K/4000K/5000K	71"(L) x 4"(W) x 3 3/8"(H)
SCX4-8FT-80W-MCT4-D	80W	124LM/W	3000K/3500K/4000K/5000K	94 1/2"(L) x 4"(W) x 3 3/8"(H)



Recessed Mounted  
(Flanged)



Surface Mounted




Wall Mounted




Suspended




T-Bar Installation

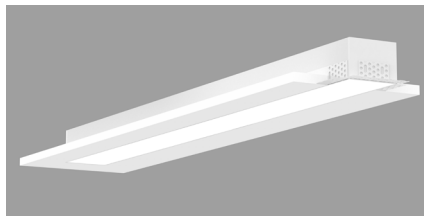

Flangless Recessed Mounted  
(Mud-In)

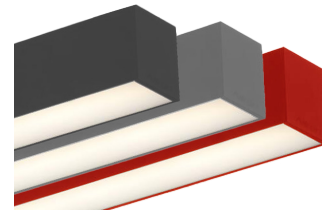


Color of Your Choice




L Module

SCX4-L-MCT4



T Module

SCX4-T-MCT4



X Module

SCX4-X-MCT4




Inside Corner Module

SCX4-IC-MCT4



Suspension Rod Kit

- SCL-RS-12 12"
- SCL-RS-18 18"
- SCL-RS-24 24"
- SCL-RS-36 36"
- SCL-RS-48 48"



Up Light Option

- 3000K
- 3500K
- 4000K
- 5000K
- Blue
- Green