

# T8-EZ6-GS-2FT

Type A Electronic Ballast Compatible  
Type B A/C Direct (Ballast Override)

B39



Clear Lens


Frosted Lens

## TECHNICAL SPECIFICATIONS:


- :: Type A + B (Dual UL)
- :: Type A: With Existing Ballast - UL No. E366061
- :: Type B: Ballast Override (AC Direct), Connect One End or Both Ends (Dual Function) - UL No. E342884
- :: Input Voltage: 120-277V AC, 50/60Hz
- :: Color Rendering Index: CRI ≥ 80
- :: Power Factor: 90%
- :: Total Harmonic Distortion: <20%
- :: Operating temperature: -13°F to 113°F
- :: 5-year warranty
- :: IP Rating: IP20 (Indoor)

## APPLICATIONS:

:: Direct Fit 4 T8 LED tubes do not burn out easily and provide bright and even lighting to schools, office spaces, retail stores and storage rooms.

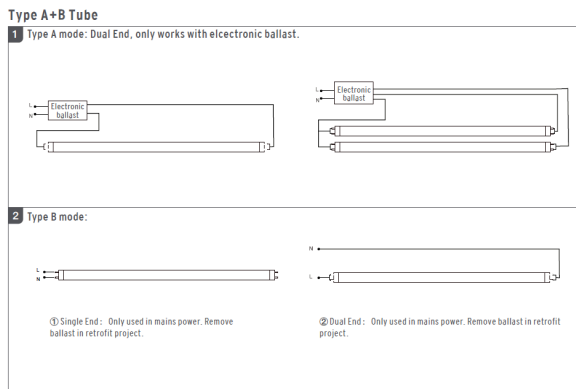

(T8 2ft. wiring diagram)

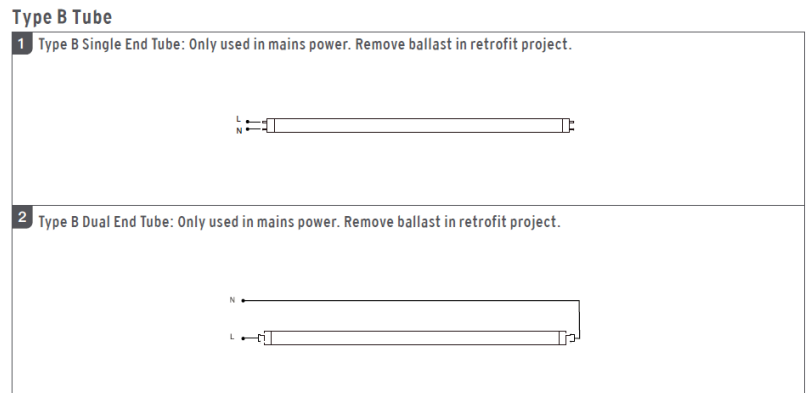

(T8 2ft. wiring diagram)

## LED T8 GLASS TUBE LAMPS — 2' LONG

CATALOG NO.	WATTS	LPW	COLOR TEMP	Lens	LENGTH
T8-EZ6-GS-2FT-10W-30K-C	10W	120LM	3000K	Clear	2'
T8-EZ6-GS-2FT-10W-35K-C	10W	120LM	3500K	Clear	
T8-EZ6-GS-2FT-10W-40K-C	10W	120LM	4000K	Clear	
T8-EZ6-GS-2FT-10W-50K-C	10W	120LM	5000K	Clear	
T8-EZ6-GS-2FT-10W-30K-F	10W	120LM	3000K	Frosted	
T8-EZ6-GS-2FT-10W-35K-F	10W	120LM	3500K	Frosted	
T8-EZ6-GS-2FT-10W-40K-F	10W	120LM	4000K	Frosted	
T8-EZ6-GS-2FT-10W-50K-F	10W	120LM	5000K	Frosted	