

# T8-HL-4FT-DIM

**DIMMABLE GLASS**  
A/C Direct (Ballast Override)

**B43**



## TECHNICAL SPECIFICATIONS:


- :: Type B: Ballast Override (AC Direct), Connect One End or Both Ends (Dual Function) - UL No. E342884
- :: Input Voltage: 120-277V AC
- :: Dimmable Down to 10% Using a Standard TRIAC LED Dimmer
- :: Color Rendering Index: CRI ≥ 83
- :: Power Factor: 90%
- :: Total Harmonic Distortion: <20%
- :: Operating temperature: -4°F to 113°F
- :: 5-year warranty
- :: IP Rating: IP20 (Indoor)

## APPLICATIONS:

:: Crystal Glass T8 Tube switches from fluorescent tubes to LED, giving more cost efficiency by providing the same amount of lumen output with less energy consumption. The LED tube offers a soft and bright light distribution.



### Type B Tube

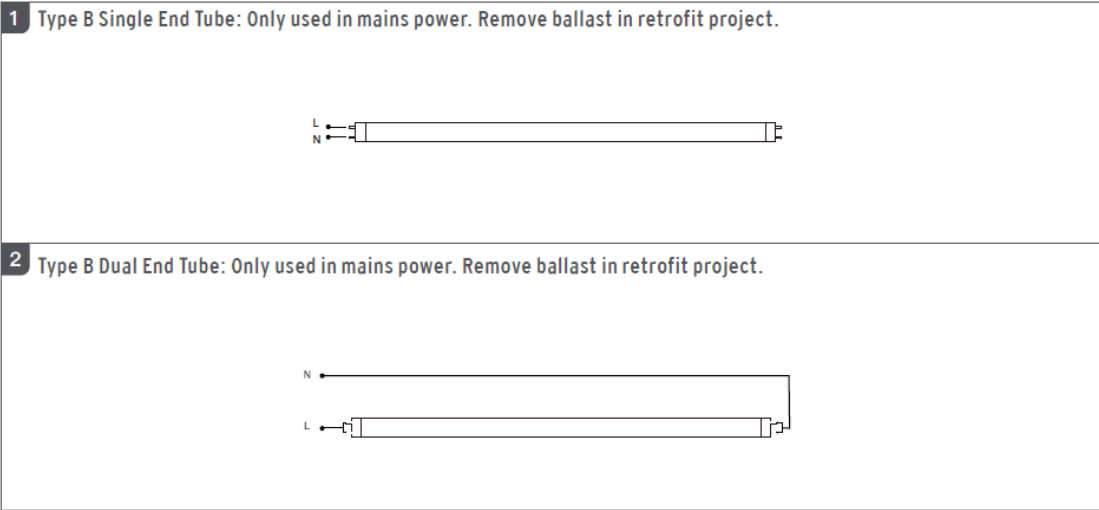

(T8 4ft. wiring diagram)

## LED T8 GLASS DIMMABLE TUBE LAMPS — 4' LONG

CATALOG NO.	WATTS	LPW	COLOR TEMP	FINISH	LENGTH
T8-HL-4FT-DIM-18W-40K-C	18W	115LW	4000K	Clear	4'
T8-HL-4FT-DIM-18W-50K-C	18W	115LW	5000K	Clear	
T8-HL-4FT-DIM-18W-40K-F	18W	115LW	4000K	Frosted	
T8-HL-4FT-DIM-18W-50K-F	18W	115LW	5000K	Frosted	