

T8-HL-SPLIT

Type B A/C Direct (Ballast Override)



Clear glass

Frosted glass



Split Model
(2 Four-Foot Lamps)
Snap & Save



T8-R17D-CONV
R17D CONVERSION KIT

TECHNICAL SPECIFICATIONS:



- :: Type B: Ballast Override (AC Direct), Connect One End or Both Ends (Dual Function) - UL No. E342884
- :: Split Model (2 Four-Foot Lamps), Snap & Save
- :: Input Voltage: 120-277V AC
- :: Dimmable: non dimmable
- :: Color Rendering Index: CRI ≥ 80
- :: Power Factor: 90%
- :: Total Harmonic Distortion: <20%
- :: Operating temperature: -13°F to 113°F
- :: 5-year warranty
- :: IP Rating: IP20 (Indoor)

APPLICATIONS:

:: Crystal Glass 8 Foot T8 Tube switches from fluorescent tubes to LED, giving more cost efficiency by providing the same amount of lumen output with less energy consumption. The LED tube offers a soft and bright light distribution.



Type B

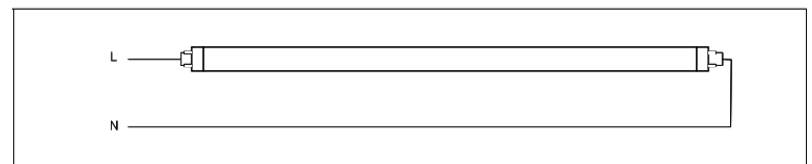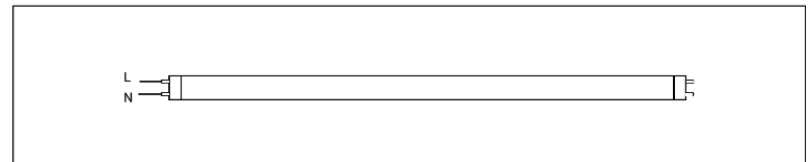

(T8 8ft. wiring diagram)

LED T8 GLASS SPLIT TUBE LAMP—8' LONG

| CATALOG NO. | WATTS | LPW | COLOR TEMP | FINISH | LENGTH |
|---------------------------|---------------------|-------|------------|---------|--------|
| T8-HL-8FT-SPLIT-42W-40K-C | 42W | 130LM | 4000K | Clear | 8' |
| T8-HL-8FT-SPLIT-42W-50K-C | 42W | 130LM | 5000K | Clear | |
| T8-HL-8FT-SPLIT-42W-40K-F | 42W | 130LM | 4000K | Frosted | |
| T8-HL-8FT-SPLIT-42W-50K-F | 42W | 130LM | 5000K | Frosted | |
| T8-R17D-COV | R17D CONVERSION KIT | | | | |