

**LSWX**  
**MP**




**TECHNICAL SPECIFICATIONS:**

- :: Multi-Power (The switch is inside the fixture)
- :: Non-cutoff optics ideal for maximum light distribution
- :: Vandal resistant housing ideal for exposed areas
- :: Back plate: Aluminum LED board: High Conductive, Waterproof, Aging Resistance, Salt Mist Resistance
- :: Front: Polycarbonate lens and housing
- :: Beam Angle: 90° x 110°
- :: Voltage: 120-277V AC 60Hz
- :: CRI: >70
- :: Power Factor: 90%
- :: Operating Temp: -4°F to 104°F
- :: 70,000 hour rated life
- :: Suitable for Wet Locations, IP54
- :: 7-year warranty

**APPLICATIONS:**

- :: Ideal for general site lighting, loading docks, doorway, pathway and parking areas.

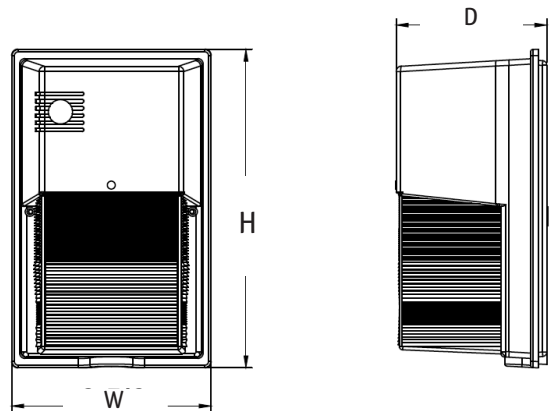

**LED NON-CUTOFF WALL PACKS WITH PHOTOCELL**

CATALOG NO.	WATTS	LPW	COLOR TEMP	DIMENSIONS
LSWX-5-30W-30K-PC	5W 10W 20W 30W	124 LPW	3000K	11"(L) x 6 5/6"(W) x 5 1/5"(H)
LSWX-5-30W-40K-PC	5W 10W 20W 30W	124 LPW	4000K	11"(L) x 6 5/6"(W) x 5 1/5"(H)
LSWX-5-30W-50K-PC	5W 10W 20W 30W	124 LPW	5000K	11"(L) x 6 5/6"(W) x 5 1/5"(H)