

# RDL-ST

## MCT5


4"



6"



AVAILABLE IN BLACK AND OIL RUBBED BRONZE

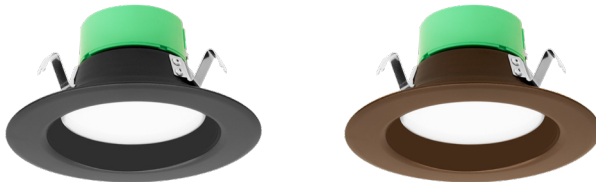

ACCESSORIES INCLUDED




Includes medium base E-26 screw-in adapter that fits any standard incandescent downlight

### TECHNICAL SPECIFICATIONS:

- :: Multi CCT (Selectable Switch on the Back of the driver)
- :: Spun Aluminum with White Powder Coat Finish
- :: Smooth Recessed Trim
- :: Optics: White Translucent Acrylic Lens
- :: Voltage: 120V AC
- :: Dimmable down to 10% using a standard TRIAC LED dimmer (refer to website for more information)
- :: CRI: 90+
- :: Power Factor: 90%
- :: Operating temperature: 104°F
- :: Rated life: 50,000 hrs
- :: Suitable for Damp locations
- :: 5-year warranty

### APPLICATIONS:

:: LED retrofit trim have been designed to be a flexible lighting solution for retrofit and new construction applications, Ideal for closets, storage areas, attics, corridors, or general lighting solutions for residential and commercial applications

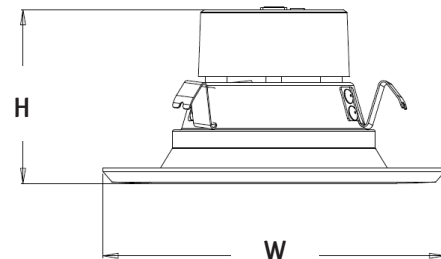

E1

## LED DOWN LIGHTS (SMOOTH TRIM) – 4" & 6" ROUND

CATALOG NO.	WATTS	LPW	COLOR TEMP	DIMENSION
RDL4-ST-MCT5	10W	65M/W	2700K/3000K/3500K/4000K/5000K	5 1/4"(W) x 2 3/4"(H)
RDL4-ST-MCT5-ORB*	10W	65M/W	2700K/3000K/3500K/4000K/5000K	5 1/4"(W) x 2 3/4"(H)
RDL4-ST-MCT5-BK**	10W	65M/W	2700K/3000K/3500K/4000K/5000K	5 1/4"(W) x 2 3/4"(H)
RDL6-ST-MCT5	15W	76LM/W	2700K/3000K/3500K/4000K/5000K	7 1/3"(W) x 3"(H)
RDL6-ST-MCT5-ORB*	15W	76LM/W	2700K/3000K/3500K/4000K/5000K	7 1/3"(W) x 3"(H)
RDL6-ST-MCT5-BK**	15W	76LM/W	2700K/3000K/3500K/4000K/5000K	7 1/3"(W) x 3"(H)

\* Oil-Rubbed Bronze \*\* Black