

**LRS-H**  
**MCT<sub>3</sub>**



LRS-H-MCT-C90-BK



LRS-H-MCT-C90-WH




LRS-H-MCT-C90-MGBR

**TECHNICAL SPECIFICATIONS:**

- :: Multi CCT Switch is Inside Fixture
- :: Back plate: Die-Cast Aluminum with Mounting/Gasket Installed
- :: Voltage: 120V AC 60Hz
- :: Polycarbonate Lens
- :: Operating Temp: -4°F to 104°F
- :: CRI: ≥ 90
- :: Beam Angle: 90° x 110°
- :: 70,000 hour rated life
- :: 7-year warranty
- :: Suitable for Wet Locations, IP44

**APPLICATIONS:**

:: Ideal for general site lighting, loading docks, doorway, pathway and parking areas.

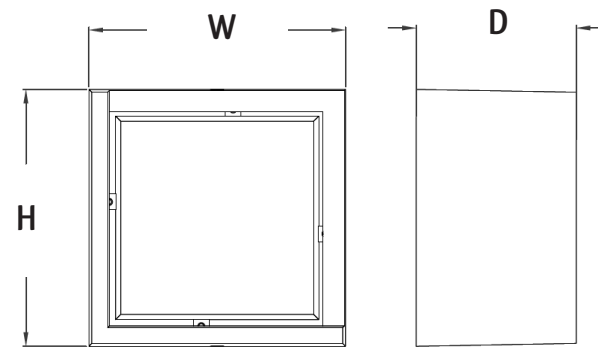

**LED ARCHITECTURAL RESIDENTIAL LIGHTS**

CATALOG NO.	FINISH	WATTS	LPW	COLOR TEMP	DIMENSIONS
LRS-H-MCT-C90-BK	BLACK	12W	54LM/W	3000K/4000K/5000K	6 3/4"(L) x 6 3/4"(W) x 4"(H)
LRS-H-MCT-C90-WH	WHITE	12W	54LM/W	3000K/4000K/5000K	6 3/4"(L) x 6 3/4"(W) x 4"(H)
LRS-H-MCT-C90-MGBR	MARINE GRADE BRONZE	12W	54LM/W	3000K/4000K/5000K	6 3/4"(L) x 6 3/4"(W) x 4"(H)