

RSL-ADJ-GS

MCT5

4"




6"




TECHNICAL SPECIFICATIONS:

- :: Multi CCT (Selectable Switch on the Back of the driver)
- :: Die-cast aluminum with white powder coat finish
- :: Pot light housing is not required even for insulated ceilings
- :: Optics: White translucent acrylic lens
- :: Lens: 0.125" white translucent acrylic
- :: Type IC rated - Approved for direct contact with insulation
- :: CRI: >80
- :: Working voltage: 120V AC
- :: Beam Spread: 100-110°
- :: Dimmable
- :: Power factor: 90% +
- :: Air-tight and damp location approved
- :: Maximum Ambient Temperature: -4°F~104°F
- :: Rated Life: 50,000 hrs, 5-year warranty
- :: ETL-listed
- :: Energy Star certified

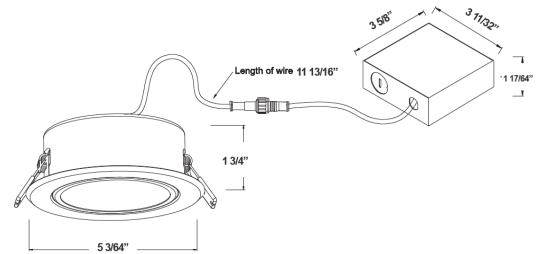

5 3/64" (W) x 1 3/4" (H)

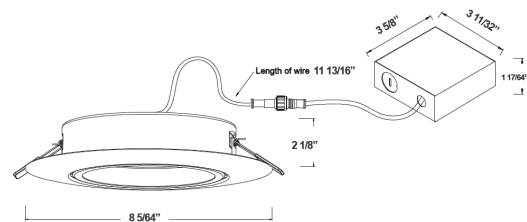

8 5/64" (W) x 2 1/8" (H)

E12

LED ADJUSTABLE ULTRA SLIM RECESSED LIGHTS

CATALOG NO.	WATTS	COLOR TEMP	LUMENS	DIAMETER
RSL4-ADJ-G2-MCT5	9W	2700K/3000K/3500K/4000K/5000K	630LM	5 3/64"(W) x 1 3/4"(H)
RSL6-ADJ-G2-MCT5	15W	2700K/3000K/3500K/4000K/5000K	1125LM	8 5/64"(W) x 2 1/8"(H)