

A19

LRX
MCTP



TECHNICAL SPECIFICATIONS:

- :: Multi CCT, Switch is on bottom of Fixture
- :: Die-Cast ADC12 Aluminum Alloy, Outdoor Powder Coated
- :: Polycarbonate Lens
- :: Beam Angle: 90° x 110°
- :: Voltage: 120V AC 60Hz
- :: CRI: ≥ 90
- :: Power Factor: >0.90
- :: Operating Temp: -4°F to 104°F
- :: 70,000 hour rated life
- :: Suitable for Wet Locations, IP44
- :: 7-year warranty


APPLICATIONS:

:: LED Dusk to Dawn Light with Photocell ideal for general site lighting, yarn/barn lighting, loading docks, doorway, pathway and parking areas.



90° EMT Arm and Wall Bracket
(Mounting Strap) included

Arm Diameter: 1-1/4" EMT Elbow

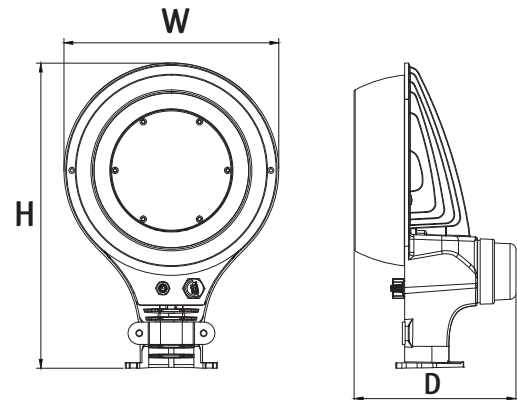

MULTI-POWER & CCT BARN / AREA LIGHT WITH PHOTOCELL

CATALOG NO.	WATTS	LPW	COLOR TEMP	DIMENSIONS
LRX-20-50W-MCTP	20W/30W/40W/50W	130LM/W	3000K/4000K/5000K/5700K	9 1/2"(W) x 13 1/2"(H)