

**LRX**  
**MCTP**



LRX-36-60W-MCTP-P  
With Bottom photocell



LRX-72-120W-MCTP-TL  
With Twist-lock photocell



90° EMT Arm and Wall Bracket  
(Mounting Strap) included


Arm Diameter: 1-1/4" EMT Elbow

**TECHNICAL SPECIFICATIONS:**

- :: Multi CCT and power, Switch is on the housing
- :: Die-Cast ADC12 Aluminum Alloy, Outdoor Powder Coated
- :: Polycarbonate Lens
- :: Dimming: 0-10V Dimming
- :: Beam Angle: 120°
- :: Voltage: 120-277V AC 60Hz
- :: CRI: > 80
- :: Power Factor: >0.90
- :: Operating Temp: -40°F to 113°F
- :: 70,000 hour rated life
- :: Suitable for Wet Locations, IP65
- :: 7-year warranty

**APPLICATIONS:**

- :: Farms/Barns, Storage Sheds, Entryways/Pathways, Industrial Yards, Security, Building Perimeters, Area Lighting

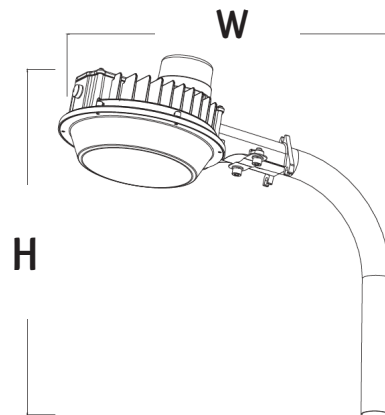

**MULTI-POWER & CCT BARN/AREA LIGHT WITH PHOTOCELL**

CATALOG NO.	WATTS	LPW	COLOR TEMP	DIMENSIONS
LRX-36-60W-MCTP-P	36W/42W/60W	130LM/W	3000K/4000K/5000K	20"(H) x 14 2/3"(W)
LRX-72-120W-MCTP-TL	72W/96W/120W	130LM/W	3000K/4000K/5000K	20 1/2"(H) x 18 2/5"(W)