


**LDSL**  
**MCT<sub>3</sub>**



DARK BRONZE

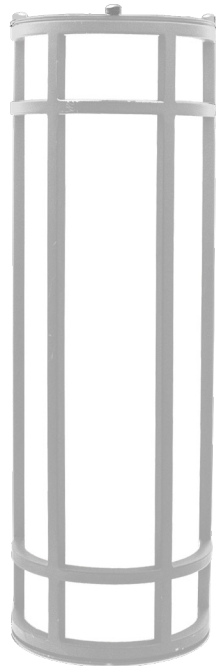


SILVER

**TECHNICAL SPECIFICATIONS:**

- :: Multi CCT: Selectable CCTs Switch located on the LED Board
- :: Die-cast Aluminum Housing with Powder Coat Finish
- :: High-Transmission Frosted Plastic Lens with Excellent Distribution and Uniformity
- :: Beam Angle: 120°
- :: 100-277V AC
- :: Color Rendering Index: ≥ 80
- :: Power Factor: 90%
- :: Operating Temp: -4°F to 113°F
- :: 70,000 hour rated life
- :: Suitable for Wet Locations, IP54
- :: 7-year warranty

**APPLICATIONS:**

- :: Ideal for general site lighting, loading docks, doorway, pathway and parking areas.

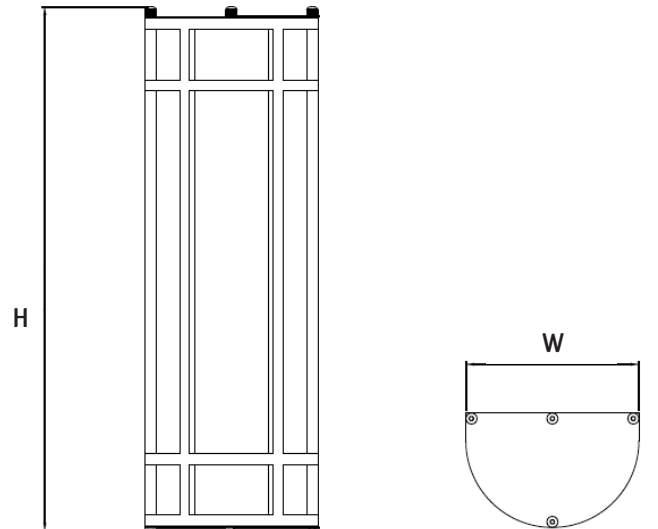

**18" OUTDOOR SCONCE LIGHT**

CATALOG	WATTS	LPW	COLOR TEMP	HOUSING	DIMENSIONS
LDSL-MCT-D-BZ	20W	75LM/W	3000K/4000K/5000K	DARK BRONZE	18 1/2"(H) x 6"(W) x 4"(D)
LDSL-MCT-D-SIL	20W	75LM/W	3000K/4000K/5000K	SILVER	18 1/2"(H) x 6"(W) x 4"(D)