

# BOL-42


**MCTP**



**BOL-42-R-C-C-MCTP**  
42In Round Flat Top  
Cone Reflector  
Clear Lens



**BOL-42-R-C-F-MCTP**  
42In Round Flat Top  
Cone Reflector  
Frosted Lens

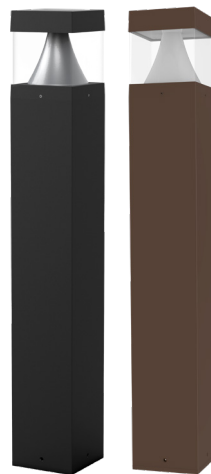

**BOL-42-S-C-C-MCTP**  
42In Square Flat Top  
Cone Reflector  
Clear Lens




### TECHNICAL SPECIFICATIONS:

- :: Wattage & CCT Selectable Switches inside fixture
- :: Mounting Accessories & Anchor Bolts Included (7-1/2" long)
- :: Corrosion Resistant Aluminum for Exterior
- :: Prismatic polycarbonate lens
- :: Beam Angle : 360°
- :: Voltage: 120-277V; 60Hz AC
- :: CRI: >70
- :: Power Factor: >0.9
- :: Operating Temperature: -40°F to 113°F
- :: 70,000 hour rated life
- :: Suitable for Wet Locations, IP65
- :: 7-year warranty

### APPLICATIONS:

- :: Bollards are designed for walkways, entrance ways, drives and other small-area lighting applications where low mounting heights are desirable

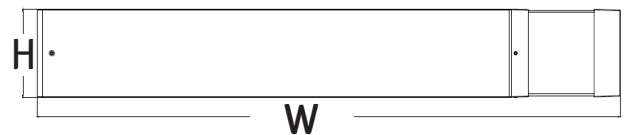

## ROUND AND SQUARE BOLLARD FLAT TOP

CATALOG NO.	WATTS	LPW	COLOR TEMP	LENS	DIMENSIONS
BOL-42-R-C-C-MCTP-BK	12W/16W/22W	130 LPW	3000K/4000K/5000K	CLEAR	42"(W) x 6 1/3"(H)
BOL-42-R-C-C-MCTP-BR	12W/16W/22W	130 LPW	3000K/4000K/5000K	CLEAR	42"(W) x 6 1/3"(H)
BOL-42-R-C-F-MCTP-BK	12W/16W/22W	130 LPW	3000K/4000K/5000K	FROSTED	42"(W) x 6 1/3"(H)
BOL-42-R-C-F-MCTP-BR	12W/16W/22W	130 LPW	3000K/4000K/5000K	FROSTED	42"(W) x 6 1/3"(H)
BOL-42-S-C-C-MCTP-BK	12W/16W/22W	130 LPW	3000K/4000K/5000K	CLEAR	42"(W) x 6 1/3"(H)
BOL-42-S-C-C-MCTP-BR	12W/16W/22W	130 LPW	3000K/4000K/5000K	CLEAR	42"(W) x 6 1/3"(H)