


A49

BOL-44

MCTP

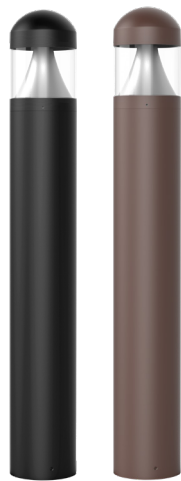

BOL-44-R-C-C-MCTP
Bollard 44In Round Dome Top
Cone Reflector
Clear Lens



BOL-44-R-C-F-MCTP
Bollard 44In Round Dome Top
Cone Reflector
Frosted Lens



BOL-44-R-L-C-MCTP
Bollard 44In Round Dome Top
Louver Reflector
Clear Lens




TECHNICAL SPECIFICATIONS:

- :: Wattage & CCT Selectable Switches inside fixture
- :: Mounting Accessories & Anchor Bolts Included (7-1/2" long)
- :: Corrosion Resistant Aluminum for Exterior
- :: Prismatic polycarbonate lens
- :: Beam Angle : 360°
- :: Voltage: 120-277 V; 60Hz AC
- :: CRI: >70
- :: Power Factor: >0.9
- :: Operating Temperature: -40°F to 113°F
- :: 70,000 hour rated life
- :: Suitable for Wet Locations, IP65
- :: 7-year warranty

APPLICATIONS:

- :: Bollards are designed for walkways, entrance ways, drives and other small-area lighting applications where low mounting heights are desirable

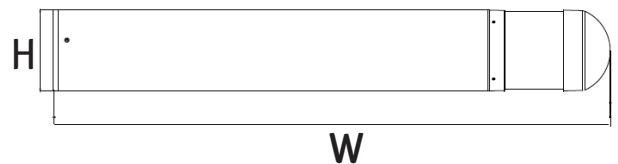

ROUND AND SQUARE BOLLARD DOME

CATALOG NO.	WATTS	LPW	COLOR TEMP	LEN	DIMENSIONS
BOL-44-R-C-C-MCTP-BK	12W/16W/22W	68 LPW	3000K/4000K/5000K	CLEAR	43 2/3"(W) x 6 1/3"(H)
BOL-44-R-C-C-MCTP-BR	12W/16W/12W	68 LPW	3000K/4000K/5000K	CLEAR	43 2/3"(W) x 6 1/3"(H)
BOL-44-R-C-F-MCTP-BK	12W/16W/22W	68 LPW	3000K/4000K/5000K	FROSTER	43 2/3"(W) x 6 1/3"(H)
BOL-44-R-C-F-MCTP-BR	12W/16W/22W	68 LPW	3000K/4000K/5000K	FROSTER	43 2/3"(W) x 6 1/3"(H)
BOL-44-R-L-C-MCTP-BK	12W/16W/22W	68 LPW	3000K/4000K/5000K	CLEAR	43 2/3"(W) x 6 1/3"(H)
BOL-44-R-L-C-MCTP-BR	12W/16W/22W	68 LPW	3000K/4000K/5000K	CLEAR	43 2/3"(W) x 6 1/3"(H)