


# Pier-Mount Lights




A.

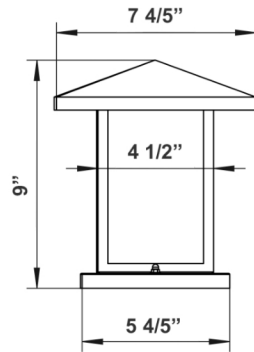

7 4/5"(W) x 9"(H)




B.

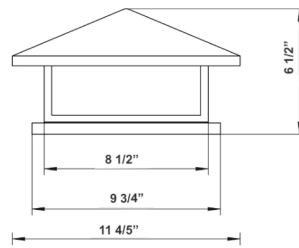

11 4/5"(W) x 6 1/2"(H)



C.

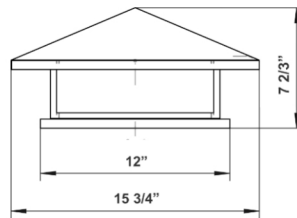

15 3/4"(W) x 7 2/3"(H)

## Wattage

12W / 15W / 18W

## Voltage Input

120V AC 60Hz

## Efficacy

25-29 LPW

## Dimming

0~10V Dimmable

## Finish


Back plate: Steel with Mounting/Gasket Installed  
Oil-Rubbed Bronze

## Beam Angles




90°


## Color Temperatures



3000K



4000K



5000K

## Features



## Accessory



PML-HGLK  
Honey color glass replacement  
Glass lens kit

Catalog No.	Fig.
PML-S-MCT-ORB	A.
PML-M-MCT-ORB	B.
PML-L-MCT-ORB	C.