


# Suspended Perf. Basket & Louver Up/Down Lights



A.

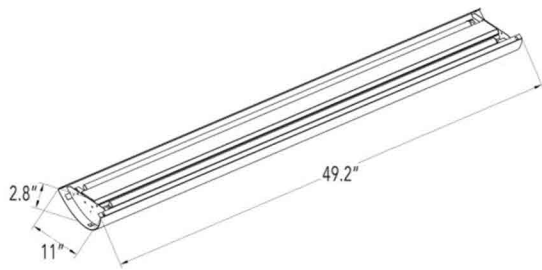

49.2" H x 2.8" D x 11" W

## Wattage

20W / 40W

## Voltage Input

120-277V AC 60Hz

## Efficacy

115 LPW


## Dimming

0~10V Dimming

## Finish

Anodized Aluminum  
Powder Coated White Finish

## Color Temperatures



## Features



## Accessory



SCLP-UD-CB  
Coupling Bracket



### Factory-Installed Options

Catalog No.	Fig.
SCLP-UD-4FT-60W-50K-D	A.
SCLP-UD-4FT-60W-40K-D	A.
SCLP-UD-4FT-60W-35K-D	A.
SCLP-UD-4FT-60W-MCT-D	A.

Watts	EM Options	Description	Up/Down Light	Description	Paint	Sensor	Description
SCLP, SCLP-UD, SCLL-UD, SCPL-UD	OPT-EM-SL1INT	INTERNAL	OPT-SCL-LMT-35K	UP/DOWN LIGHT MODULE	OPT-CLR-100(BK/GR/SR/WH)	OPT-SEN-2US	ULTRASONIC BI-LEVEL DIMMING (REMOTE NOT NEEDED)
			OPT-SCL-LMT-40K				
			OPT-SCL-LMT-50K			WEC-3RC	REMOTE CONTROL