


Suspended 2/3 Louver & Perf. Center Basket Lights

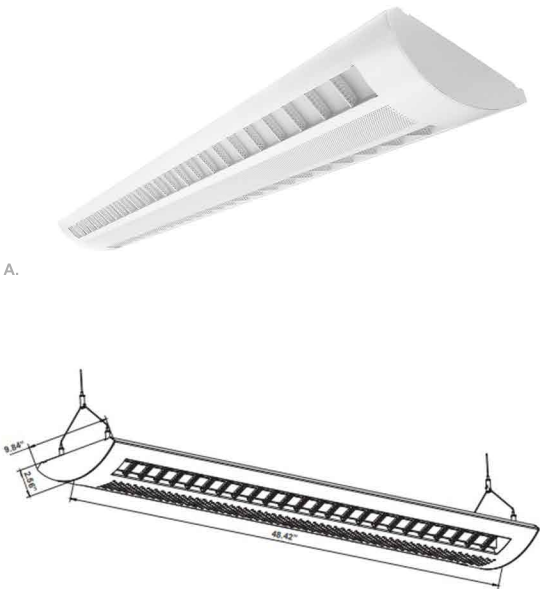

48.42" H x 9.84" W x 2.56" D

Wattage

20W / 40W / 60W

Voltage Input

120-277V AC 60Hz

Efficacy

110 LPW

Dimming

0~10V Dimmable

Finish

Anodized Aluminum
Powder Coated White Finish

Color Temperatures

3500K 4000K 5000K

Features



Accessory



SCPP-DEC
Decorative End Cap for SCPP

Factory-Installed Options

Catalog No.	Fig.
SCPP-UD-4FT-60W-50K-D	A.
SCPP-UD-4FT-60W-40K-D	A.
SCPP-UD-4FT-60W-35K-D	A.

Watts	EM Options	Description	Up/Down Light	Description	Paint	Sensor	Description
SCLP, SCLP-UD, SCLL-UD, SCPL-UD	OPT-EM-SL1INT	INTERNAL	OPT-SCL-LMT-35K	UP/DOWN LIGHT MODULE	OPT-CLR-100(BK/GR/SR/WH)	OPT-SEN-2US	ULTRASONIC 8-LEVEL DIMMING (REMOTE NOT NEEDED)
			OPT-SCL-LMT-40K			FOR ALL MODELS	
			OPT-SCL-LMT-50K			WEC-3RC	REMOTE CONTROL