


Architectural Round Suspended Down Light



A.

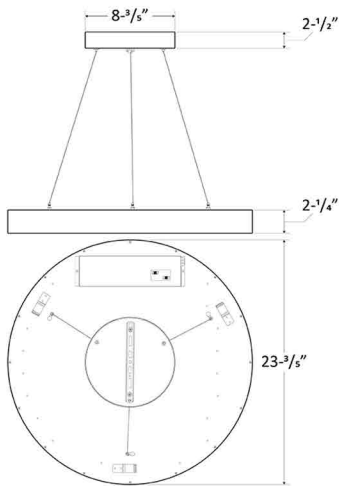

Canopy Dimension: 8 3/5" (L) x 2 1/2" (H)
 Fixture Dimension: 23 3/5" (L) x 2/14" (H)

Wattage

30W / 40W / 50W

Voltage Input

120-277V AC 50/60Hz


Efficacy

102 LM/W

Dimming

0~10V Dimmable




Beam Angles

 114°(H) x 114°(V)

Finish

Aluminum Housing
 Sandy White Finish

Color Temperatures

 3000K  3500K  4000K

Features



Factory-Installed Options

Catalog No.	Fig.
SCR-24D-50K-D	A
SCR-24D-40K-D	A
SCR-24D-MCTP-D	A

Watts	EM Options	Description	Photocell	Description	Paint	Sensor	Description
ALL MODELS	OPT-EM-AC2EXT	EXTERNAL	OPT-SLCP-ULK	UP LIGHT 20W, MCT	N/A	N/A	N/A