


# SCX Architectural 2-3/4" Indirect Linkable Lights

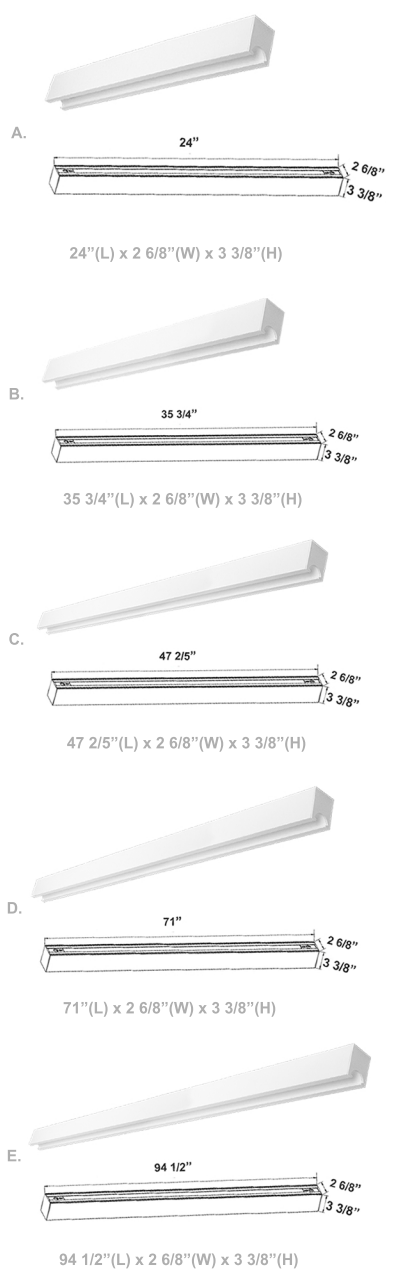

### Wattage

20W / 40W / 60W / 80W

### Voltage Input

120-277V AC  
50/60Hz

### Efficacy

100-110 LPW

### Dimming

0~10V Dimmable


### Finish

Aluminum Housing & Low Profile Modern Design  
Matte White Finish

### Beam Angles



### Color Temperatures



### Features



Catalog No.	Fig.	Catalog No.	Fig.
SCX-2FT-20W-MCT-D-IDL	A.	SCX-6FT-60W-MCT-D-IDL	D.
SCX-3FT-30W-MCT-D-IDL	B.	SCX-8FT-80W-MCT-D-IDL	E.
SCX-4FT-40W-MCT-D-IDL	C.		

### Factory-Installed Options

Model	Description	Model	Description
OPT-SCX-CLR-2FT	COLOR OPTION	OPT-EM-CM1INT	EMERGENCY BATTERY BACKUP