


SCX4 4" Architectural IDL Linkable Lights

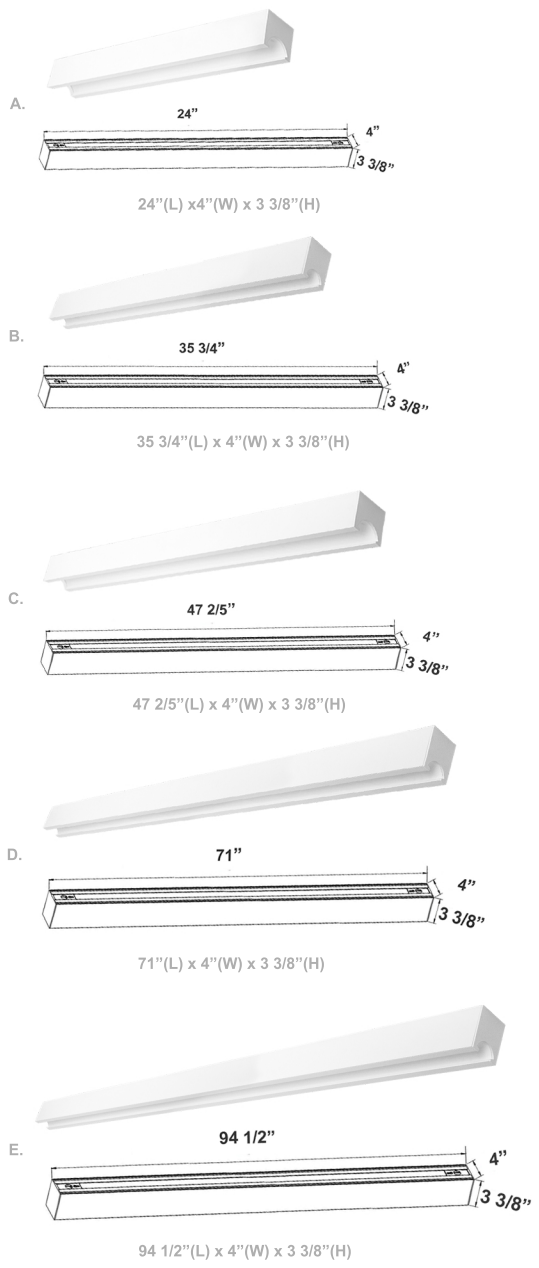

Wattage

20W / 30W / 40W / 60W / 80W

Voltage Input

120-277V AC
50/60Hz

Efficacy

110-124 LPW


Dimming

0~10V Dimmable

Finish

Aluminum Housing & Low Profile Modern Design
Matte White Finish

Beam Angles



Color Temperatures



Features





Factory-Installed Options

Catalog No.	Fig.	Catalog No.	Fig.
SCX4-2FT-20W-MCT-D-IDL	A.	SCX4-6FT-60W-MCT-D-IDL	D.
SCX4-3FT-30W-MCT-D-IDL	B.	SCX4-8FT-80W-MCT-D-IDL	E.
SCX4-4FT-40W-MCT-D-IDL	C.		



Length	EM Option	Length	EM Option
2FT	OPT-SCX-ULM-2FT-8W-MCT4	2FT	OPT-SCX-ULM-2FT-8W-MCT4
2FT	OPT-SCX-ULM-2FT-8W-MCT4	2FT	OPT-SCX-ULM-2FT-8W-MCT4
2FT	OPT-SCX-ULM-2FT-8W-MCT4		

SCX4 Corner Fixture Modules

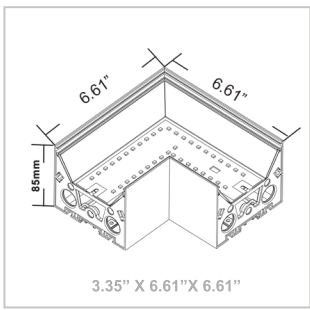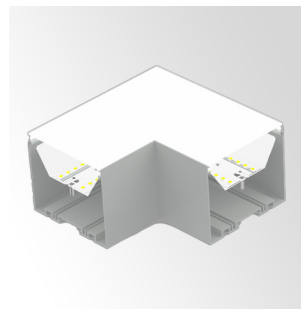



L-Shaped Module

Catalog No.
SCX4-L-MCT4

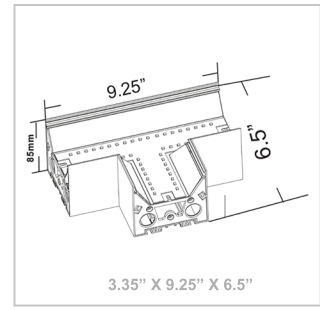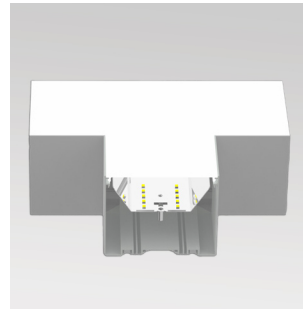



T-Shaped Module

Catalog No.
SCX4-T-MCT4

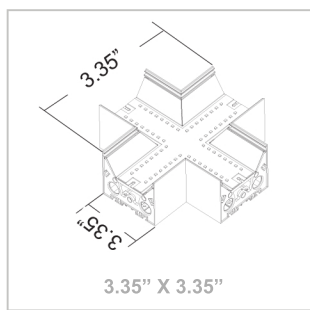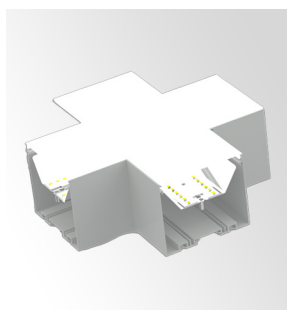

X-Shaped Corner

Catalog No.
SCX4-Y-MCT4

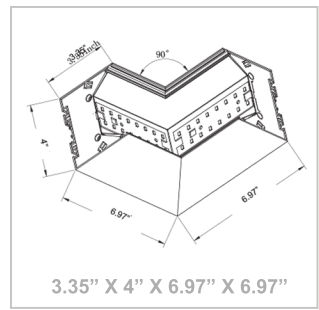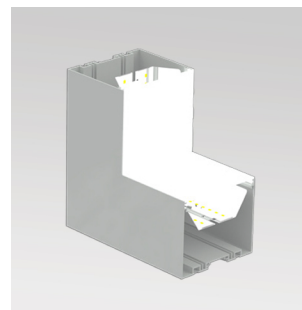

Inside Corner Modules

Catalog No.
SCX4-6IN-MCT4