


LED Security Lights with PIR Sensor




A.



10 1/4" (W) x 9 1/2" (H) x 9" (D)




B.



10 1/4" (W) x 9 1/2" (H) x 9" (D)




C.



10 1/4" (W) x 9 1/2" (H) x 9" (D)



D.



10 1/4" (W) x 9 1/2" (H) x 9" (D)

Wattage

20W / 30W

Voltage Input

120VAC, 50/60Hz

Efficacy

95LM/W


Dimming

0~10V Dimmable

Finish

Die-cast aluminum with powder coat finish
Bronze / White

Color Temperatures

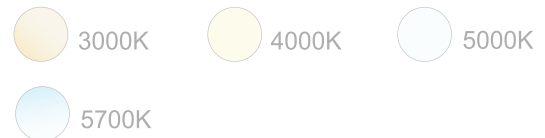

Features



Catalog No.	Fig.	Catalog No.	Fig.	Catalog No.	Fig.
SL-20W-50K-BZ-P	A	SL-20W-30K-WH-P	B	SL-30W-MCT-BZ-P	C
SL-20W-30K-BZ-P	A	SL-20W-MCT-WH-P	B	SL-30W-50K-WH-P	D
SL-20W-MCT-BZ-P	A	SL-30W-50K-BZ-P	C	SL-30W-30K-WH-P	D
SL-20W-50K-WH-P	B	SL-30W-30K-BZ-P	C	SL-30W-MCT-WH-P	D

Factory-Installed Options

Watts	EM Options	Description	Photocell	Description	Paint	Sensor	Description
30W	OPT-EM-OD1EXT	EXTERNAL BOX	OPT-PC-B	BUTTON	OPT-CLR-85(BK/GR/SR/WH)	OPT-SEN-3MRLV-5	PROGRAMMABLE MICROWAVE (81-LEVEL)
50W/60W	OPT-EM-OD3INT	INTERNAL	OPT-PC-B	BUTTON	OPT-CLR-85(BK/GR/SR/WH)	OPT-SEN-3MRLV-5	PROGRAMMABLE MICROWAVE (81-LEVEL)
80W/120W-LG	OPT-EM-OD3INT	INTERNAL	OPT-PC-B	BUTTON	OPT-CLR-85(BK/GR/SR/WH)	WEC-8RC	REMOTE CONTROL
Vandal Res.		Descriptions		480 V Option		Description	
OPT-TRS-T20		HAMPER RESISTANT SCREW		OPT-WP-480V		CHANGE VOLTAGE	