


# Suspended Up/Down Clear Panel Light

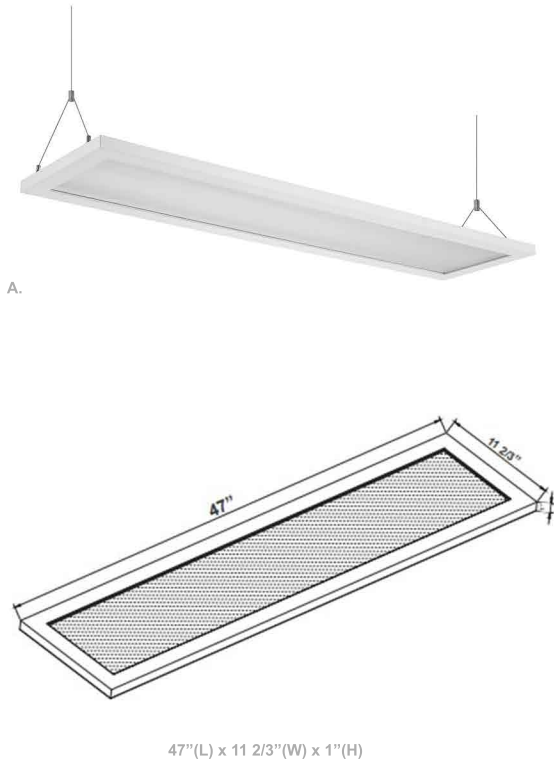

### Wattage

40W

### Voltage Input

120-277V AC 60Hz


### Efficacy

105 LPW

### Dimming

0~10V Dimmable




### Beam Angles

 104.8°(H) x 100.5°(V)

### Finish

Anodized Aluminum  
Powder Coated White Finish

### Color Temperatures

 3500K  4000K  5000K

### Features



### Factory-Installed Options

Watts	EM Options	Description	Photocell	Description	Paint	Sensor	Description
ALL MODELS	OPT-EM-AC2EXT	EXTERNAL	OPT-SLCP-ULK	UP LIGHT 20W, MCT	N/A	N/A	N/A

Catalog No.	Fig.
SPL-4FT-40W-50K-D	A.
SPL-4FT-40W-40K-D	A.
SPL-4FT-40W-35K-D	A.
SPL-4FT-40W-MCT-D	A.