


Type A & B LED T8 Glass Lamps

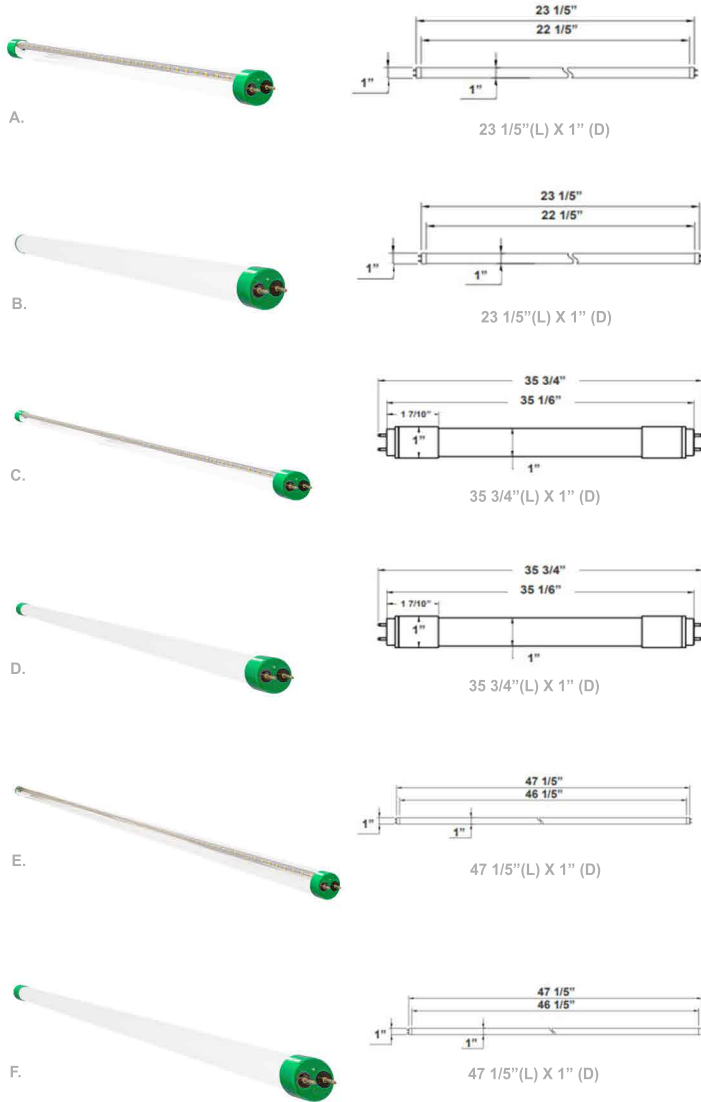

Wattage

10W / 12W / 15W / 18W

Voltage Input

120-277V
50/60Hz AC

Efficacy

120-133 LPW


Beam Angle



Finish

G13 Base Type
Shatter-Proof Film
Clear / Frosted Lens

Color Temperatures

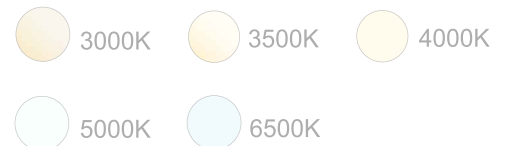

Features



Catalog No.	Fig.	Catalog No.	Fig.	Catalog No.	Fig.	Catalog No.	Fig.
T8-EZ6-GS-2FT-10W-30K-C	A.	T8-EZ6-GS-3FT-12W-40K-C	C.	T8-EZ6-GS-4FT-15W-40K-C	E.	T8-EZ6-GS-4FT-18W-40K-C	E.
T8-EZ6-GS-2FT-10W-30K-F	B.	T8-EZ6-GS-3FT-12W-40K-F	D.	T8-EZ6-GS-4FT-15W-40K-F	F.	T8-EZ6-GS-4FT-18W-40K-F	F.
T8-EZ6-GS-2FT-10W-35K-C	A.	T8-EZ6-GS-3FT-12W-50K-C	C.	T8-EZ6-GS-4FT-15W-50K-C	E.	T8-EZ6-GS-4FT-18W-50K-C	E.
T8-EZ6-GS-2FT-10W-35K-F	B.	T8-EZ6-GS-3FT-12W-50K-F	D.	T8-EZ6-GS-4FT-15W-50K-F	F.	T8-EZ6-GS-4FT-18W-50K-F	F.
T8-EZ6-GS-2FT-10W-40K-C	A.	T8-EZ6-GS-4FT-15W-30K-C	C.	T8-EZ6-GS-4FT-18W-30K-C	E.		
T8-EZ6-GS-2FT-10W-40K-F	B.	T8-EZ6-GS-4FT-15W-30K-F	D.	T8-EZ6-GS-4FT-18W-30K-F	F.		
T8-EZ6-GS-2FT-10W-50K-C	A.	T8-EZ6-GS-4FT-15W-35K-C	C.	T8-EZ6-GS-4FT-18W-35K-C	E.		
T8-EZ6-GS-2FT-10W-50K-F	B.	T8-EZ6-GS-4FT-15W-35K-F	D.	T8-EZ6-GS-4FT-18W-35K-F	F.		