


# UFHB

## TECHNICAL SPECIFICATIONS:

- :: Housing: Aluminum heat sink, Silver finish  
(Chain not included)
- :: Optical Lens: Fresnel Lens
- :: Voltage: 100-277V; 60Hz AC
- :: Cord type: 6' SJTW 18/3 AWG cable
- :: LED: LumiLEDs
- :: Efficacy: 135LM/W
- :: CRI: >80
- :: Power Factor: ≥0.9
- :: Beam Angle: 90°
- :: THD: <20%
- :: 0~10V Dimming
- :: Operating Temp: -4°F to 122°F
- :: Aluminum LED Board: High conductive, waterproof, aging resistant, salt mist resistance, long-life
- :: 5-year warranty
- :: Suitable for Wet Locations, IP66

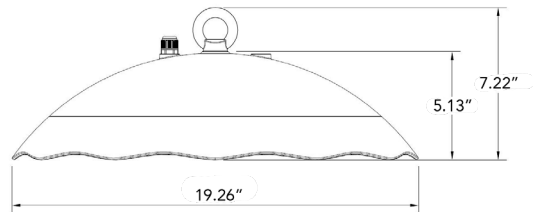

## LED FOOD SERVICE & LABORATORY HIGH BAY

CATALOG NO.	WATTS	LUMENS	COLOR TEMP	REPLACEMENT RANGE	DIMENSIONS
UFHB-150W-50K	150W	20250LM	5000K	450~650 MH	19.26"(Diameter) x 7.22" (H)
UFHB-200W-50K	200W	27000LM	5000K	700~800 MH	