

UHB


120~277V

TECHNICAL SPECIFICATIONS:

- :: Housing: ACD12 aluminum heat sink, SUS black plate. outdoor powder coating
- :: Prismatic PC cover
- :: Voltage: 120~277V; 60Hz AC
- :: LED: LumiLEDs
- :: Efficacy: 120LM/W
- :: CRI: >80
- :: Power Factor: ≥0.9
- :: Beam Angle: 110°
- :: THD: <20%
- :: 0~10V Dimming
- :: Operating Temp: -4°F to 122°F
- :: Aluminum LED Board: High conductive, waterproof, aging resistance, salt mist resistance, long-life
- :: The human body induction function (adapter sold separately)
- :: 7-year warranty



Lens view

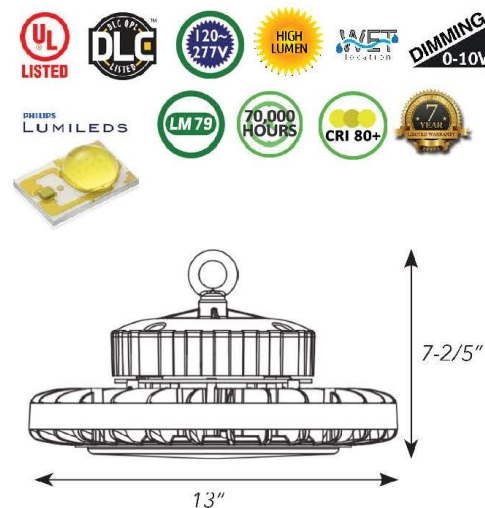

ECONOMY SERIES LED UFO HIGH BAY FIXTURES WITH PC COVER

CATALOG NO.	WATTS	LUMENS	COLOR TEMP	REPLACEMENT RANGE	DIMENSIONS
UHB-100-CW	100W	12000LM	5000K	150~250 MH	13"(Diameter) x 7-2/5" (H)
UHB-100-NW	100W	12000LM	4000K	150~250 MH	
UHB-150-CW	150W	17500LM	5000K	200~400 MH	
UHB-150-NW	150W	17500LM	4000K	200~400 MH	

UHB-SMB-100

Optional surface mount bracket for 100W & 150W

