


5" LED Outdoor Square Cylinder Lights

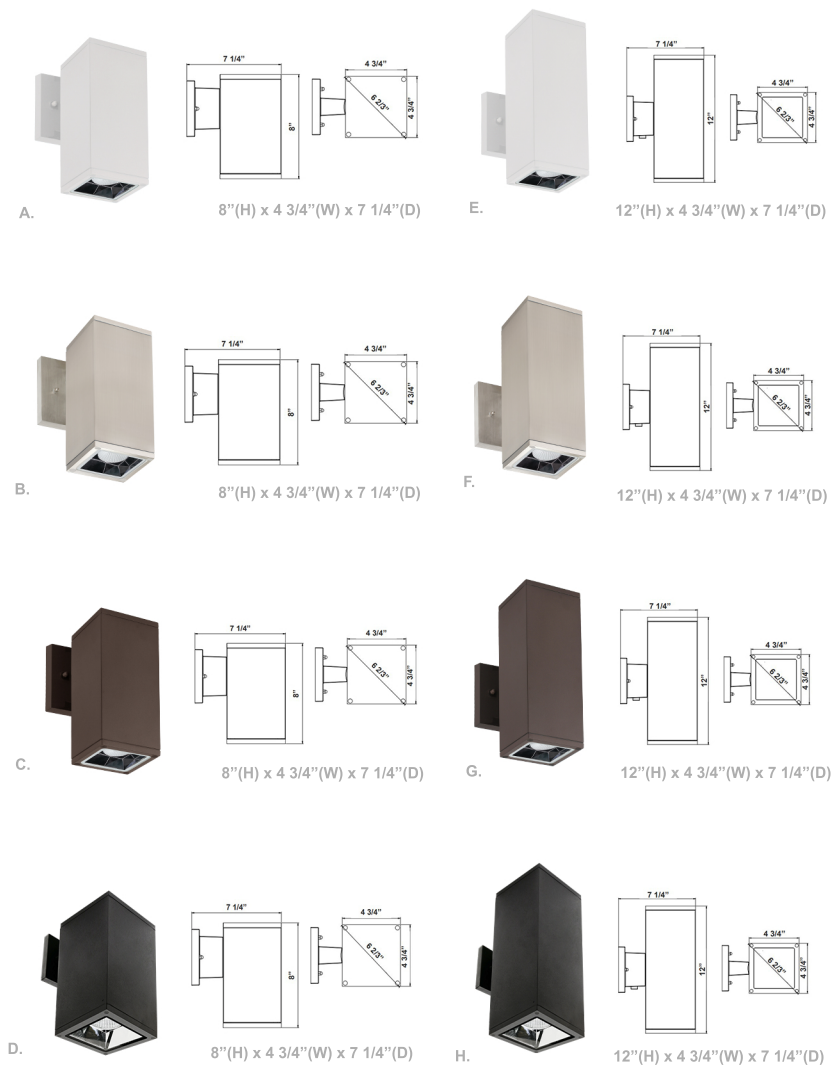

Wattage

20W / 40W

Voltage Input

120-277V AC

Dimmable

(Dual Function) TRIAC
Dimmable at 120V & 1-10V
Dimming at 120-277V


Finish

Die-Cast Aluminum & Glass

Beam Angles



Color Temperatures



Features



Catalog No.	Fig.	Catalog No.	Fig.
WMCS5-DL-MCT-WH-DD	A	WMCS-UDL-MCT-WH-DT	E
WMCS5-DL-MCT-BN-DD	B	WMCS-UDL-MCT-BN-DT	F
WMCS5-DL-MCT-BR-DD	C	WMCS-UDL-MCT-BR-DT	G
WMCS5-DL-MCT-BK-DD	D	WMCS-UDL-MCT-BK-DT	H

Factory-Installed Options

Watts	EM Options	Description	Photozell	Description	Paint	Sensor	Description
4" & UP	OPT-EM-FM2INT	INTERNAL	OPT-PC-B	BUTTON	N/A	OPT-SEN-WMC	PROGRAMMABLE MICROINIR (B-LEVEL)
4" & UP	OPT-EM-FM2INT	INTERNAL	OPT-PC-B	BUTTON	N/A	WEC-8RC	OPTIONAL REMOTE CONTROL