


# XTSL-CL SUPER SLIM SERIES



### TECHNICAL SPECIFICATIONS:

- :: 1.2 watts per head
- :: Dual 120/277 voltage operation
- :: Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- :: 3.6V maintenance-free sealed Ni-MH rechargeable battery for long life
- :: Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- :: 90-minute rated with push style test switch and red indicator light
- :: Universal exit: single or double face – wall (back) or ceiling mount
- :: Mounting accessories included
- :: UL-listed
- :: 3-year warranty

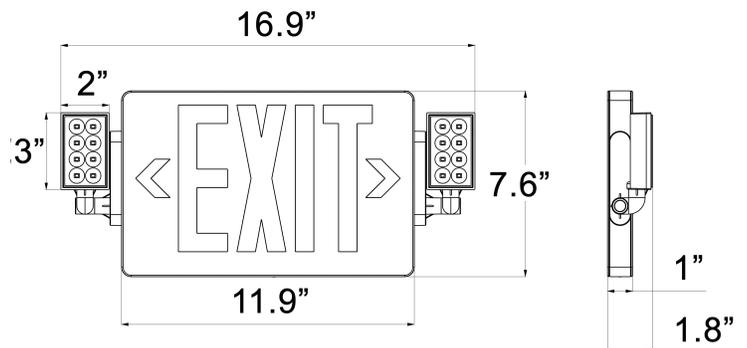

## SUPER SLIM LED EXIT SIGN WITH ADJUSTABLE LED HEADS

CATALOG NO.	LETTERS	NUMBER OF FACEPLATE	VOLTAGE	BATTERY
XTSL-CL-RW	Red	Universal Single/Double	120/277	3.6 Ni-MH
XTSL-CL-GW	Green	Universal Single/Double	120/277	3.6 Ni-MH

H2