
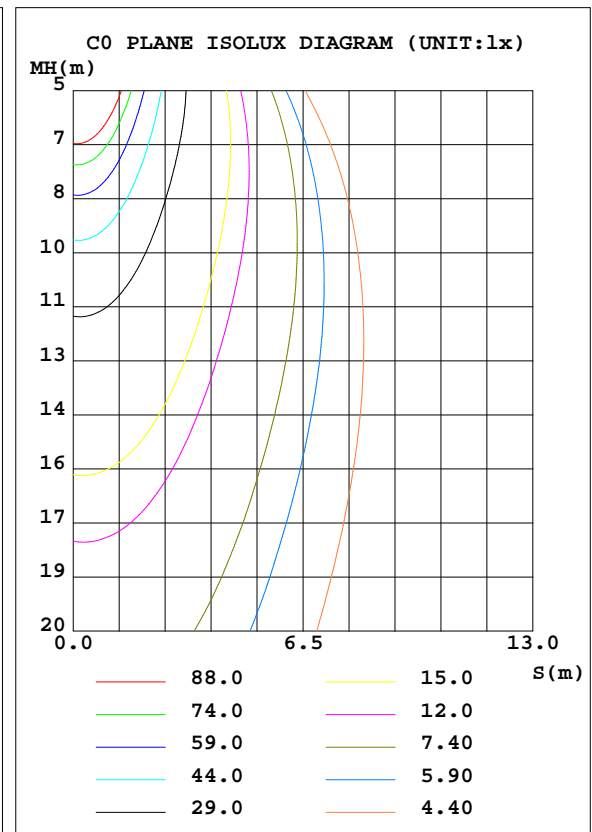


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:278.53V I:0.1538A P:39.216W PF:0.9154 Freq:59.98Hz Lamp Flux:3708.73x1 lm		
NAME: 8寸单发光	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.04*0.21M	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 94.57 lm/W			
MODEL		I _{max} (cd)	3690	S/MH(C0/180)	0.66
NOMINAL POWER(W)	39.33	LOR(%)	100.0	S/MH(C90/270)	0.66
RATED VOLTAGE(V)	277	TOTAL FLUX(lm)	3708.7	η UP, DN(C0-180)	0.0,50.0
NOMINAL FLUX(lm)	3708.73	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.0,50.0
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	0.75
TEST VOLTAGE(V)	277	η down(%)	100.0	CIBSE SHR MAX	0.80

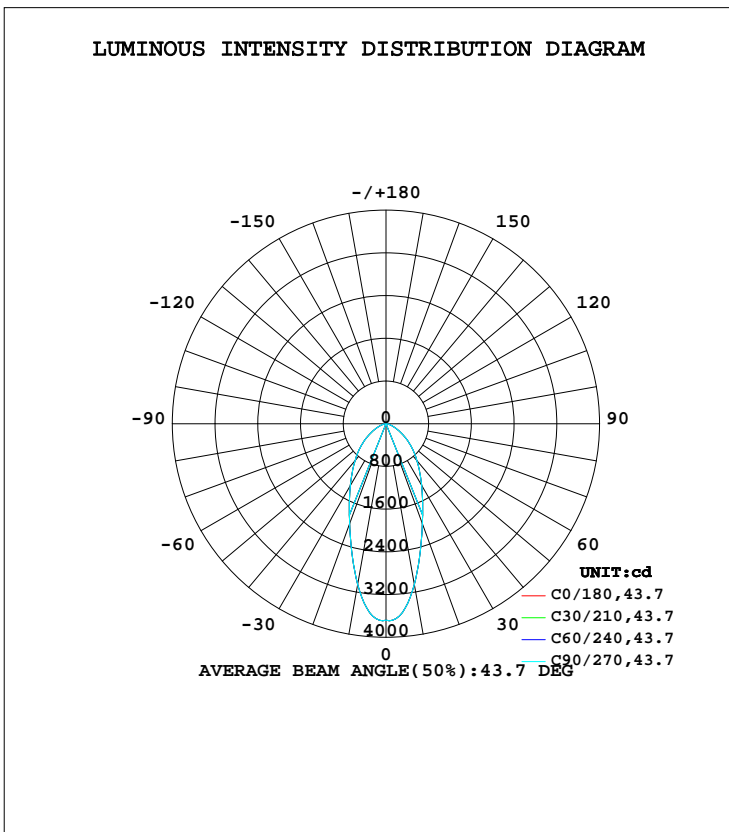

C Range: 0 - 0DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:13 November 2021

γ Range: 0 - 110DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.404.6
 Humidity:65.0%
 Test Distance:1.819m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	Φ lum,lamp
10	3056	3056	3056	3056	3056	3056	3056	3056	0- 10	322.3	322.3	8.69,8.69
20	1996	1996	1996	1996	1996	1996	1996	1996	10- 20	691.3	1014	27.3,27.3
30	1337	1337	1337	1337	1337	1337	1337	1337	20- 30	749.3	1763	47.5,47.5
40	904.0	904.0	904.0	904.0	904.0	904.0	904.0	904.0	30- 40	690.8	2454	66.2,66.2
50	574.5	574.5	574.5	574.5	574.5	574.5	574.5	574.5	40- 50	565.1	3019	81.4,81.4
60	303.4	303.4	303.4	303.4	303.4	303.4	303.4	303.4	50- 60	385.3	3404	91.8,91.8
70	130.3	130.3	130.3	130.3	130.3	130.3	130.3	130.3	60- 70	205.7	3610	97.3,97.3
80	37.19	37.19	37.19	37.19	37.19	37.19	37.19	37.19	70- 80	83.04	3693	99.6,99.6
90	0.9510	0.9510	0.9510	0.9510	0.9510	0.9510	0.9510	0.9510	80- 90	15.59	3708	100,100
100	0.0934	0.0934	0.0934	0.0934	0.0934	0.0934	0.0934	0.0934	90-100	0.1884	3709	100,100
110	0.1391	0.1391	0.1391	0.1391	0.1391	0.1391	0.1391	0.1391	100-110	0.1217	3709	100,100
120	0	0	0	0	0	0	0	0	110-120	0.0071	3709	100,100
130	0	0	0	0	0	0	0	0	120-130	0	3709	100,100
140	0	0	0	0	0	0	0	0	130-140	0	3709	100,100
150	0	0	0	0	0	0	0	0	140-150	0	3709	100,100
160	0	0	0	0	0	0	0	0	150-160	0	3709	100,100
170	0	0	0	0	0	0	0	0	160-170	0	3709	100,100
180	0	0	0	0	0	0	0	0	170-180	0	3709	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 0DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:13 November 2021

γ Range: 0 - 110DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.404.6
 Humidity:65.0%
 Test Distance:1.819m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:278.53V I:0.1538A P:39.216W PF:0.9154 Freq:59.98Hz Lamp Flux:3708.73x1 lm		
NAME: 8寸单发光	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.04*0.21M	Shielding Angle:

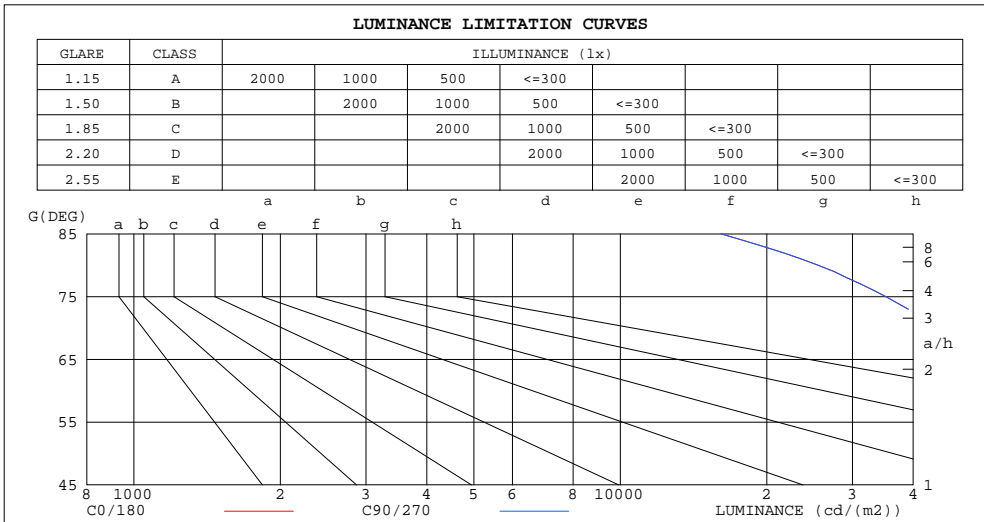

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	16104	16104
80	25495	25495
75	35129	35129
70	45361	45361
65	57521	57521
60	72238	72238
55	89085	89085
50	106396	106396
45	123216	123216


C Range: 0 - 0DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:13 November 2021

γ Range: 0 - 110DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.404.6
 Humidity:65.0%
 Test Distance:1.819m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:278.53V I:0.1538A P:39.216W PF:0.9154 Freq:59.98Hz Lamp Flux:3708.73x1 lm		
NAME: 8寸单发光	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.04*0.21M	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.08	1.05	1.02	1.06	1.03	1.00	1.02	.99	.97	.98	.96	.94	.94	.93	.91	.89
2.0	.98	.92	.88	.96	.91	.87	.92	.88	.85	.89	.86	.83	.86	.84	.81	.79
3.0	.88	.82	.77	.87	.81	.76	.84	.79	.75	.82	.77	.74	.79	.76	.73	.71
4.0	.81	.74	.68	.79	.73	.68	.77	.71	.67	.75	.70	.66	.73	.69	.65	.63
5.0	.74	.67	.61	.73	.66	.61	.71	.65	.60	.69	.64	.60	.67	.63	.59	.57
6.0	.68	.61	.55	.67	.60	.55	.66	.59	.55	.64	.59	.54	.63	.58	.54	.52
7.0	.63	.56	.51	.62	.55	.50	.61	.55	.50	.60	.54	.50	.58	.53	.49	.48
8.0	.59	.51	.46	.58	.51	.46	.57	.51	.46	.56	.50	.46	.55	.50	.46	.44
9.0	.55	.48	.43	.54	.48	.43	.53	.47	.43	.52	.47	.43	.51	.46	.42	.41
10.0	.51	.45	.40	.51	.44	.40	.50	.44	.40	.49	.44	.40	.48	.43	.40	.38

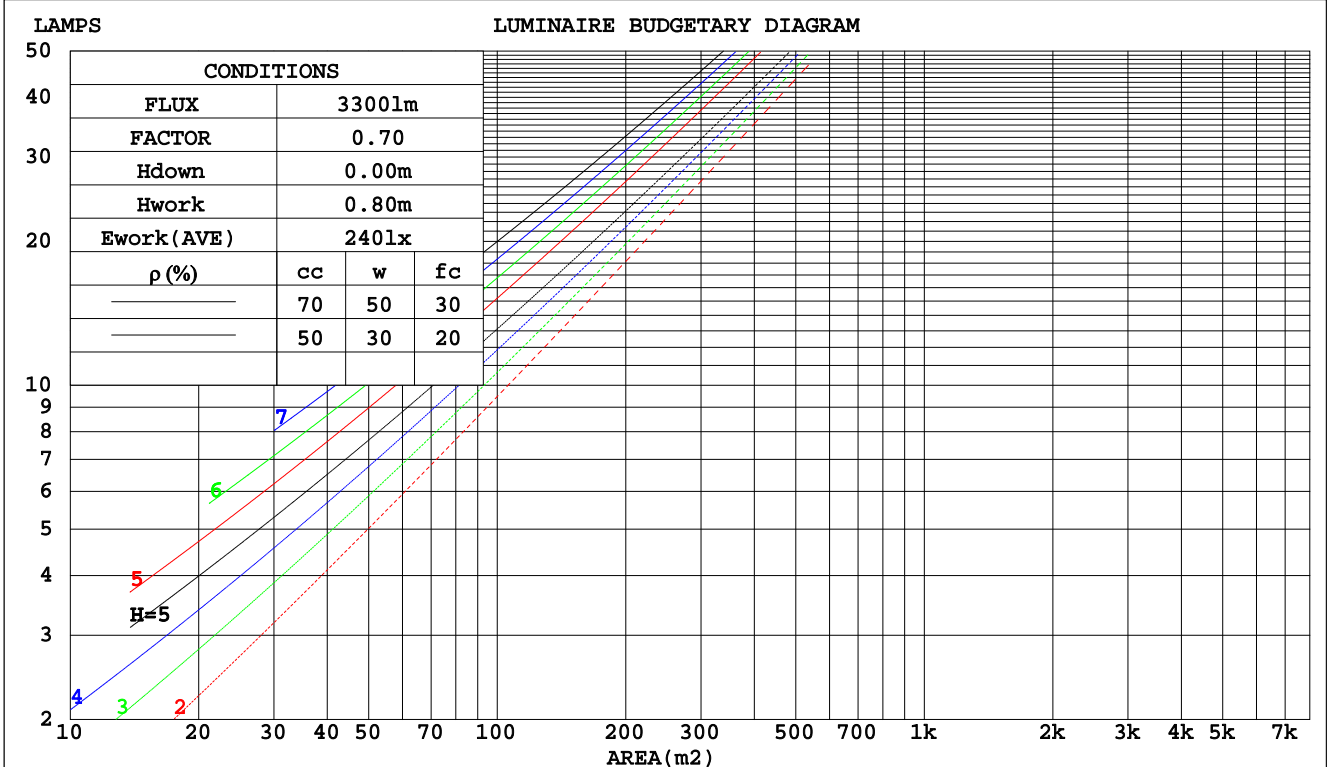

C Range: 0 - 0DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:13 November 2021

γ Range: 0 - 110DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.404.6
 Humidity:65.0%
 Test Distance:1.819m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:278.53V I:0.1538A P:39.216W PF:0.9154 Freq:59.98Hz Lamp Flux:3708.73x1 lm		
NAME: 8寸单发光	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.04*0.21M	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.232	.132	.042	.225	.128	.041	.212	.122	.039	.200	.116	.037	.190	.110	.035	
2.0	.224	.123	.038	.218	.120	.037	.207	.115	.036	.197	.110	.035	.187	.106	.033	
3.0	.212	.113	.034	.206	.111	.033	.197	.107	.032	.188	.103	.032	.180	.099	.031	
4.0	.199	.103	.030	.195	.102	.030	.186	.099	.029	.178	.096	.029	.171	.093	.028	
5.0	.187	.095	.028	.183	.094	.027	.176	.091	.027	.169	.089	.026	.162	.087	.026	
6.0	.176	.088	.025	.173	.087	.025	.166	.085	.025	.160	.083	.024	.154	.081	.024	
7.0	.166	.082	.023	.163	.081	.023	.157	.079	.023	.151	.078	.023	.146	.076	.022	
8.0	.157	.077	.022	.154	.076	.021	.149	.074	.021	.144	.073	.021	.139	.071	.021	
9.0	.148	.072	.020	.146	.071	.020	.141	.070	.020	.137	.068	.020	.132	.067	.019	
10.0	.141	.067	.019	.138	.067	.019	.134	.066	.019	.130	.065	.018	.126	.064	.018	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.191	.191	.191	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.175	.157	.141	.150	.135	.121	.102	.093	.084	.059	.054	.049	.019	.017	.016	
2.0	.163	.132	.106	.140	.114	.092	.096	.079	.064	.055	.046	.038	.018	.015	.012	
3.0	.153	.114	.083	.131	.098	.072	.090	.068	.050	.052	.040	.030	.017	.013	.010	
4.0	.145	.100	.066	.124	.086	.057	.085	.060	.040	.049	.035	.024	.016	.011	.008	
5.0	.137	.089	.054	.117	.077	.047	.081	.054	.033	.047	.032	.020	.015	.010	.006	
6.0	.130	.080	.045	.111	.069	.039	.077	.049	.027	.045	.029	.016	.014	.009	.005	
7.0	.123	.073	.038	.106	.063	.033	.073	.044	.023	.042	.026	.014	.014	.009	.005	
8.0	.117	.067	.032	.101	.058	.028	.070	.041	.020	.041	.024	.012	.013	.008	.004	
9.0	.112	.062	.028	.096	.054	.025	.067	.038	.018	.039	.022	.010	.013	.007	.003	
10.0	.106	.058	.025	.092	.050	.022	.064	.035	.015	.037	.021	.009	.012	.007	.003	

C Range: 0 - 0DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:13 November 2021

γ Range: 0 - 110DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.404.6
 Humidity:65.0%
 Test Distance:1.819m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:278.53V I:0.1538A P:39.216W PF:0.9154 Freq:59.98Hz Lamp Flux:3708.73x1 lm										
NAME: 8寸单发光					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:0.04*0.21M			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.7	23.9	22.9	24.1	24.3	22.7	23.9	22.9	24.1	24.3
3H	23.2	24.3	23.5	24.5	24.7	23.2	24.3	23.5	24.5	24.7
4H	23.3	24.4	23.6	24.6	24.9	23.3	24.4	23.6	24.6	24.9
6H	23.4	24.4	23.7	24.6	24.9	23.4	24.4	23.7	24.6	24.9
8H	23.4	24.3	23.7	24.6	24.9	23.4	24.3	23.7	24.6	24.9
12H	23.3	24.3	23.7	24.5	24.8	23.3	24.3	23.7	24.5	24.8
4H 2H	22.9	24.0	23.2	24.2	24.4	22.9	24.0	23.2	24.2	24.4
3H	23.6	24.5	23.9	24.8	25.1	23.6	24.5	23.9	24.8	25.1
4H	23.8	24.6	24.1	24.9	25.2	23.8	24.6	24.1	24.9	25.2
6H	23.9	24.6	24.3	25.0	25.3	23.9	24.6	24.3	25.0	25.3
8H	23.9	24.6	24.3	24.9	25.3	23.9	24.6	24.3	24.9	25.3
12H	23.9	24.5	24.3	24.9	25.3	23.9	24.5	24.3	24.9	25.3
8H 4H	23.8	24.5	24.2	24.8	25.2	23.8	24.5	24.2	24.8	25.2
6H	24.0	24.5	24.4	24.9	25.3	24.0	24.5	24.4	24.9	25.3
8H	24.0	24.5	24.4	24.9	25.4	24.0	24.5	24.4	24.9	25.4
12H	24.0	24.4	24.5	24.9	25.3	24.0	24.4	24.5	24.9	25.3
12H 4H	23.8	24.4	24.2	24.8	25.2	23.8	24.4	24.2	24.8	25.2
6H	23.9	24.4	24.4	24.9	25.3	23.9	24.4	24.4	24.9	25.3
8H	24.0	24.4	24.5	24.9	25.3	24.0	24.4	24.5	24.9	25.3
Variations with the observer position at spacings:										
S = 1.0H	+ 0.6 / - 0.7					+ 0.6 / - 0.7				
1.5H	+ 0.3 / - 0.3					+ 0.3 / - 0.3				
2.0H	+ 1.1 / - 1.2					+ 1.1 / - 1.2				

CIE Pub.117, 3709 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 4.6)

C Range: 0 - 0DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:13 November 2021

γ Range: 0 - 110DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.404.6
 Humidity:65.0%
 Test Distance:1.819m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:278.53V I:0.1538A P:39.216W PF:0.9154 Freq:59.98Hz Lamp Flux:3708.73x1 lm		
NAME: 8寸单发光	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.04*0.21M	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	70	61	55	70	61	55	69	60	55	50
0.80	80	71	65	79	70	65	77	70	64	59
1.00	87	78	73	86	78	73	84	79	72	66
1.25	93	85	80	92	84	79	89	83	78	73
1.50	97	90	84	96	89	84	93	87	83	77
2.00	102	96	91	100	95	90	97	93	89	82
2.50	105	99	95	103	98	94	99	95	92	85
3.00	107	102	98	105	101	97	102	98	95	88
4.00	110	106	103	108	104	101	104	101	99	91
5.00	112	108	105	110	107	104	105	103	101	92
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 0DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:13 November 2021

γ Range: 0 - 110DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.404.6
 Humidity:65.0%
 Test Distance:1.819m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:278.53V I:0.1538A P:39.216W PF:0.9154 Freq:59.98Hz Lamp Flux:3708.73x1 lm		
NAME: 8寸单发光	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.04*0.21M	Shielding Angle:

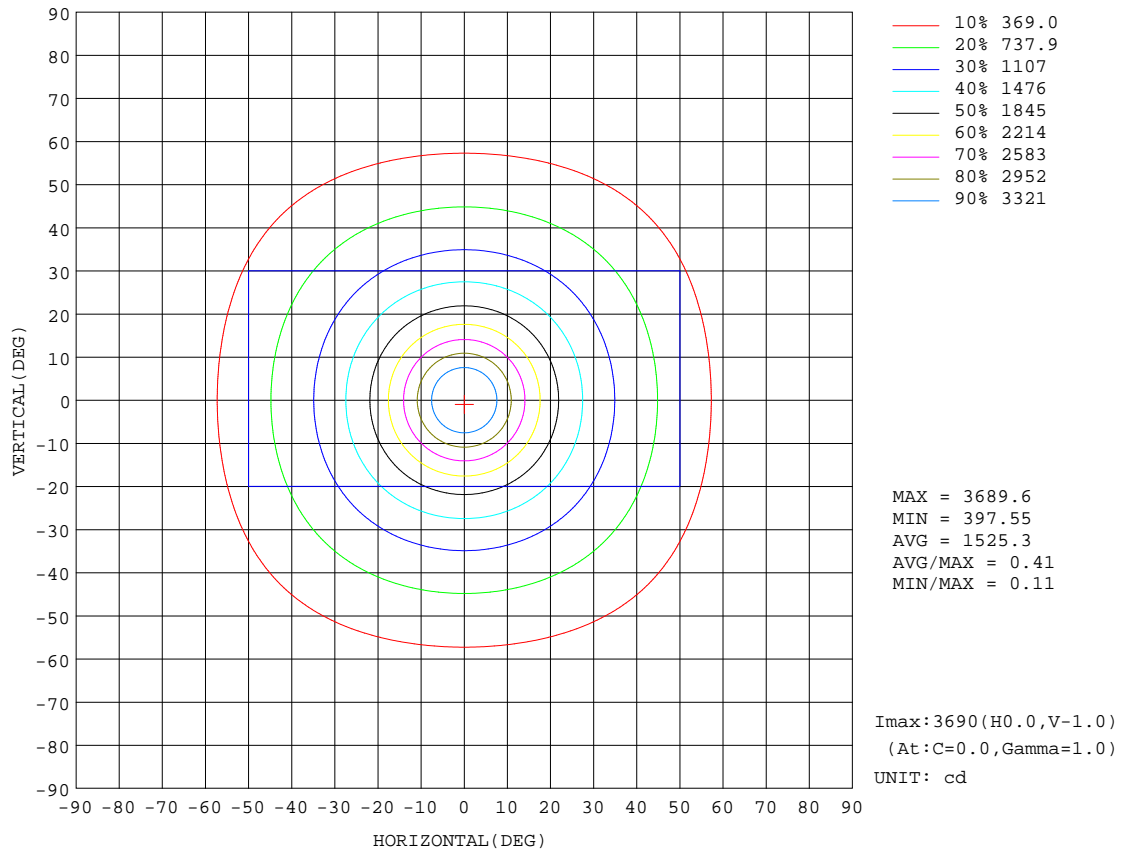


C Range: 0 - 0DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:13 November 2021

γ Range: 0 - 110DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.404.6
 Humidity:65.0%
 Test Distance:1.819m [K=1.0000]
 Remarks:

AAI Figure

Test:U:278.53V I:0.1538A P:39.216W PF:0.9154 Freq:59.98Hz Lamp Flux:3708.73x1 lm		
NAME: 8寸单发光	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.04*0.21M	Shielding Angle:

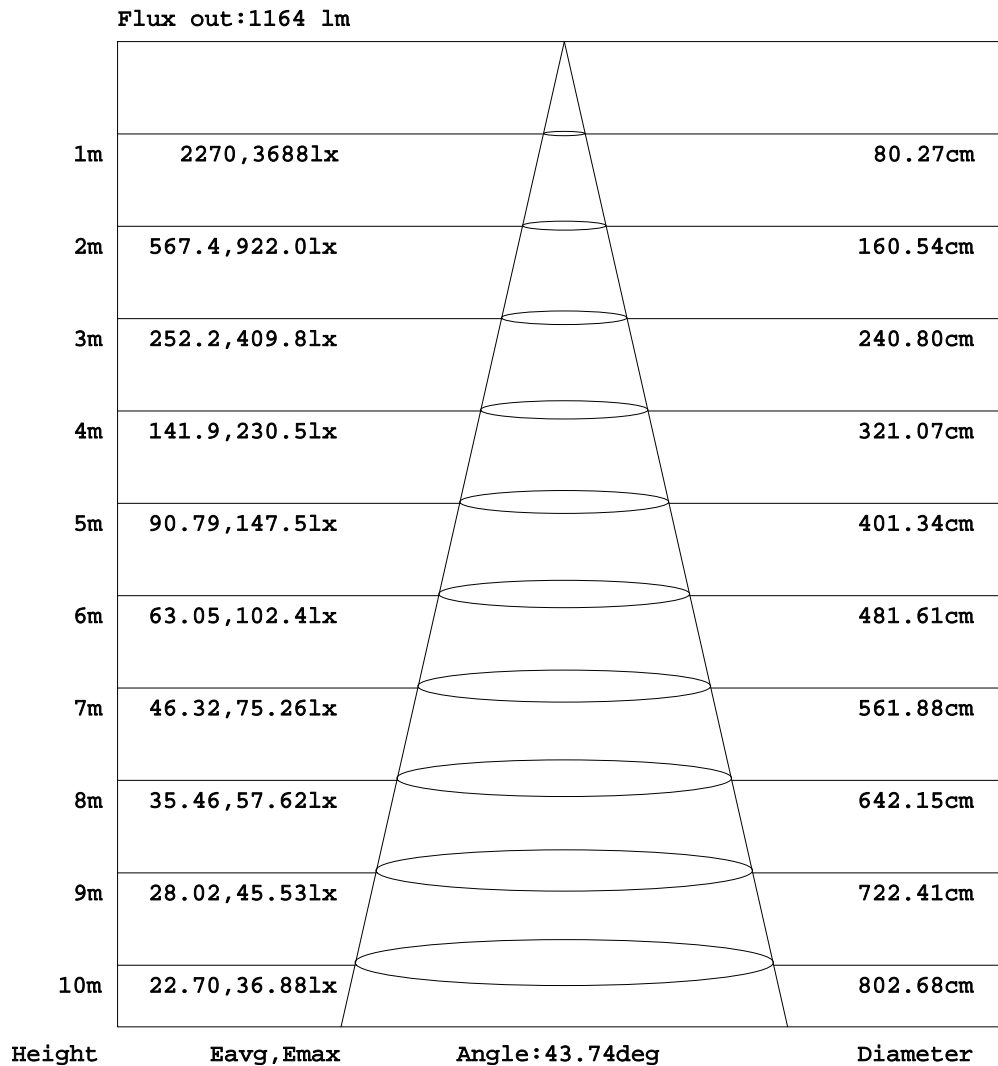


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 0DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:13 November 2021

γ Range: 0 - 110DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.404.6
 Humidity:65.0%
 Test Distance:1.819m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:278.53V I:0.1538A P:39.216W PF:0.9154 Freq:59.98Hz Lamp Flux:3708.73x1 lm		
NAME: 8寸单发光	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.04*0.21M	Shielding Angle:

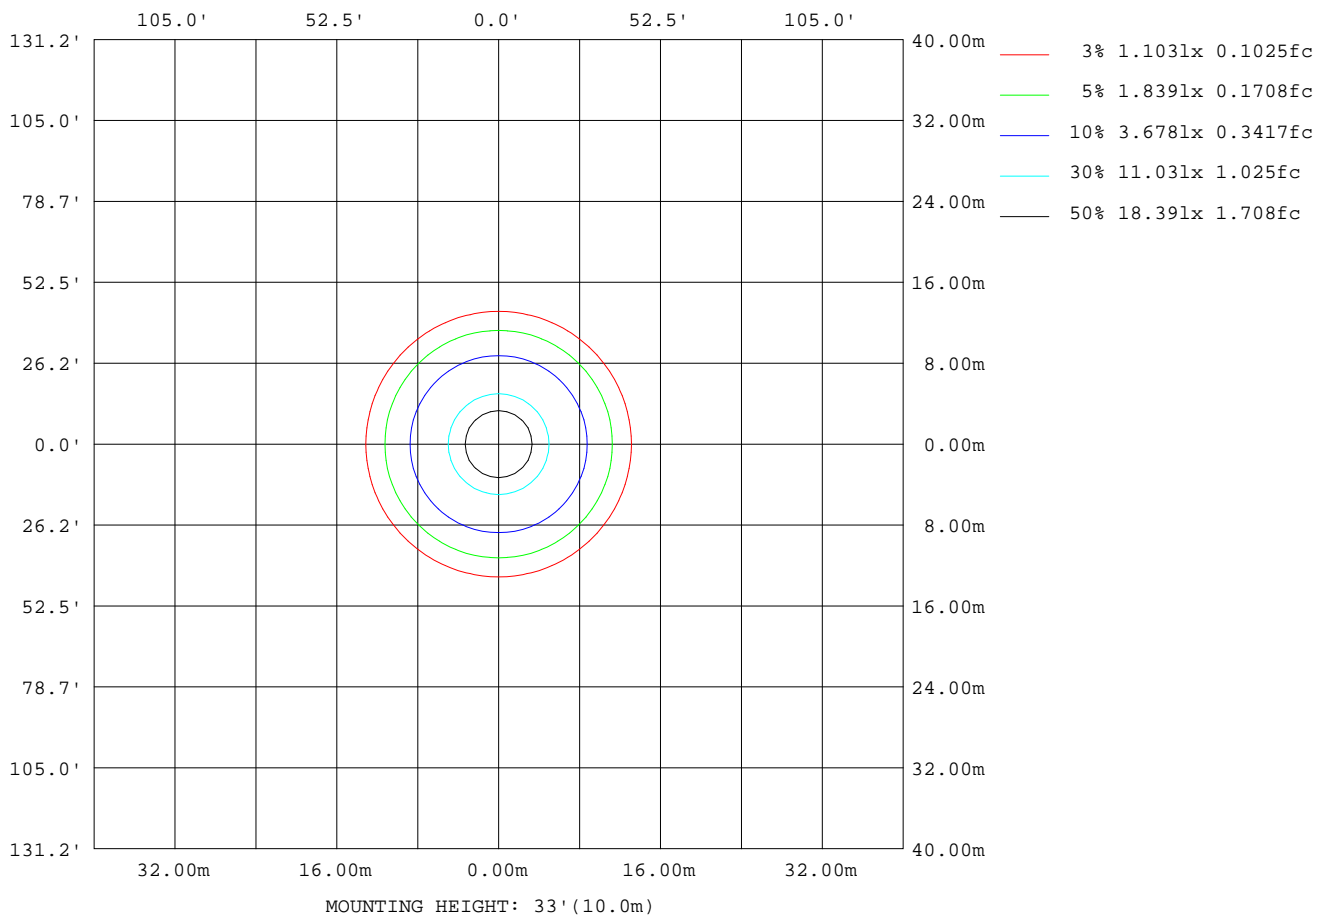

C Range: 0 - 0DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:13 November 2021

γ Range: 0 - 110DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.404.6
 Humidity:65.0%
 Test Distance:1.819m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:278.53V I:0.1538A P:39.216W PF:0.9154 Freq:59.98Hz Lamp Flux:3708.73x1 lm		
NAME: 8寸单发光	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.04*0.21M	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	57521
L_0~180(75)av	35129
L_0~180(85)av	16104
L_90~270(65)av	57521
L_90~270(75)av	35129
L_90~270(85)av	16104
L_45(65)av	57521
L_45(75)av	35129
L_45(85)av	16104

Standard: GB/T 29293-2012

C Range: 0 - 0DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:13 November 2021

γ Range: 0 - 110DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.404.6
 Humidity:65.0%
 Test Distance:1.819m [K=1.0000]
 Remarks:

Planar Illuminance Curve

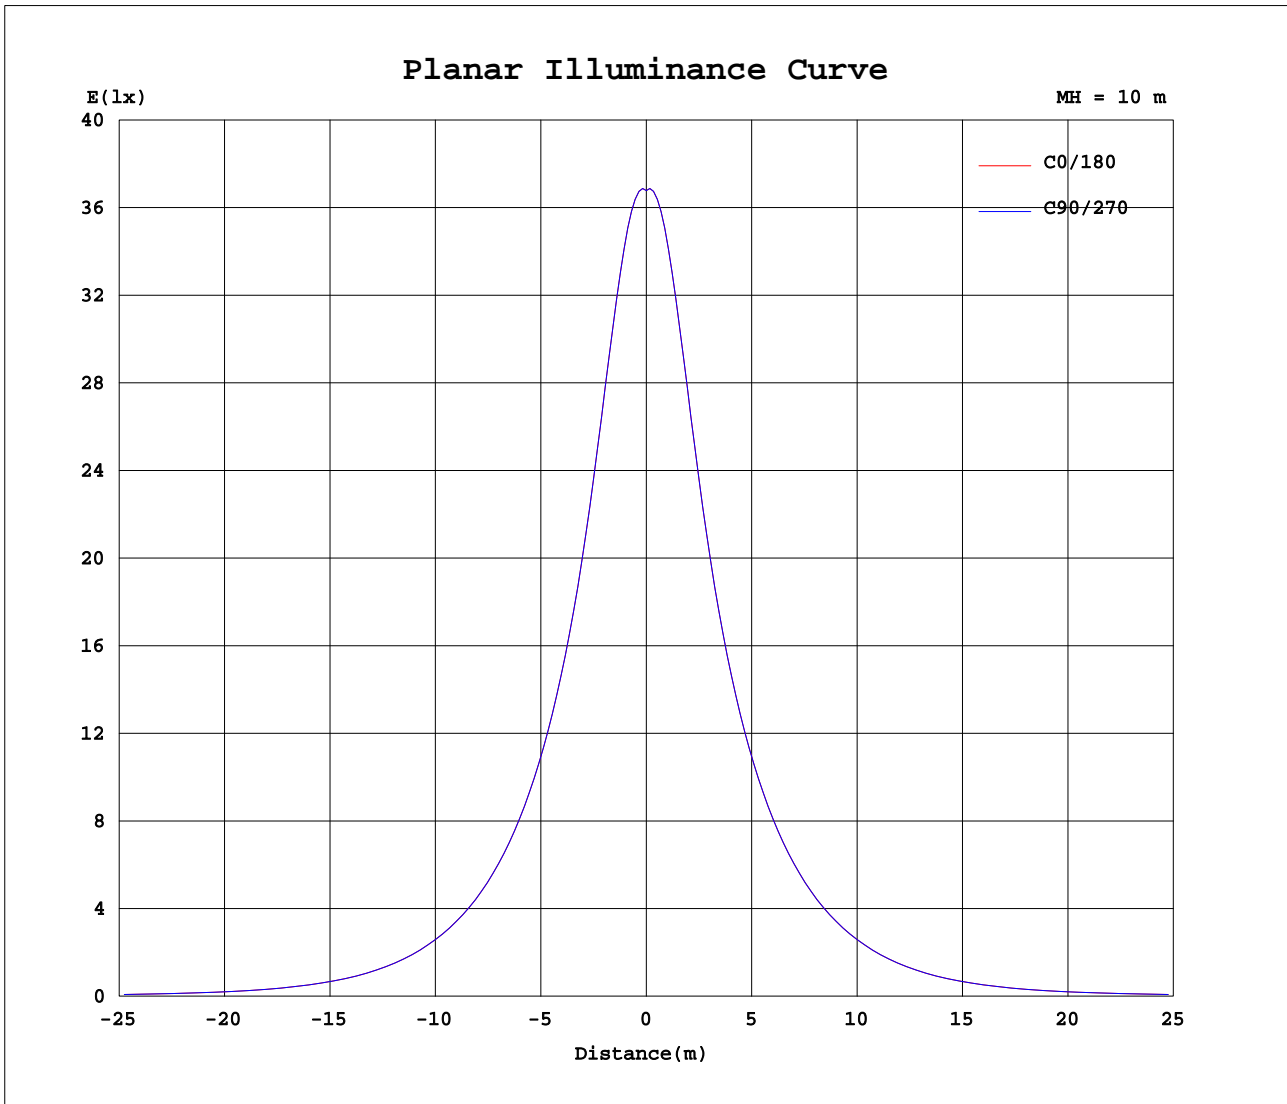

C Range: 0 - 0DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 13 November 2021

γ Range: 0 - 110DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.404.6
 Humidity: 65.0%
 Test Distance: 1.819m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:278.53V I:0.1538A P:39.216W PF:0.9154 Freq:59.98Hz Lamp Flux:3708.73x1 lm		
NAME: 8寸单发光	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.04*0.21M	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	3678	3678	3678	3678	3678	3678	3678	3678	3678	3678	3678	3678							
5	3548	3548	3548	3548	3548	3548	3548	3548	3548	3548	3548	3548							
10	3056	3056	3056	3056	3056	3056	3056	3056	3056	3056	3056	3056							
15	2480	2480	2480	2480	2480	2480	2480	2480	2480	2480	2480	2480							
20	1996	1996	1996	1996	1996	1996	1996	1996	1996	1996	1996	1996							
25	1624	1624	1624	1624	1624	1624	1624	1624	1624	1624	1624	1624							
30	1337	1337	1337	1337	1337	1337	1337	1337	1337	1337	1337	1337							
35	1102	1102	1102	1102	1102	1102	1102	1102	1102	1102	1102	1102							
40	904	904	904	904	904	904	904	904	904	904	904	904							
45	732	732	732	732	732	732	732	732	732	732	732	732							
50	574	574	574	574	574	574	574	574	574	574	574	574							
55	429	429	429	429	429	429	429	429	429	429	429	429							
60	303	303	303	303	303	303	303	303	303	303	303	303							
65	204	204	204	204	204	204	204	204	204	204	204	204							
70	130	130	130	130	130	130	130	130	130	130	130	130							
75	76.4	76.4	76.4	76.4	76.4	76.4	76.4	76.4	76.4	76.4	76.4	76.4							
80	37.2	37.2	37.2	37.2	37.2	37.2	37.2	37.2	37.2	37.2	37.2	37.2							
85	11.8	11.8	11.8	11.8	11.8	11.8	11.8	11.8	11.8	11.8	11.8	11.8							
90	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95							
95	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07							
100	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.09							
105	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.11							
110	0.14	0.14	0.14	0.14	0.14	0.14	0.14	0.14	0.14	0.14	0.14	0.14							
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							

C Range: 0 - 0DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:13 November 2021

γ Range: 0 - 110DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.404.6
 Humidity:65.0%
 Test Distance:1.819m [K=1.0000]
 Remarks: