
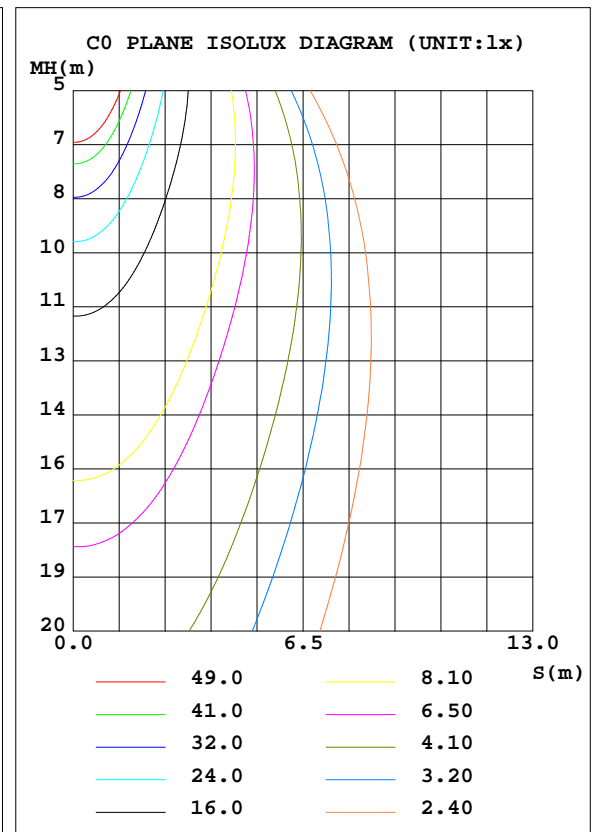


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:278.60V I:0.1635A P:42.454W PF:0.9321 Freq:59.98Hz Lamp Flux:2112.77x1 lm		
NAME: 8寸双发光 (单边数据)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.04*0.21M	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 49.77 lm/W			
MODEL		I _{max} (cd)	2026	S/MH(C0/180)	0.66
NOMINAL POWER(W)	42.56	LOR(%)	100.0	S/MH(C90/270)	0.66
RATED VOLTAGE(V)	277	TOTAL FLUX(lm)	2112.8	η UP, DN(C0-180)	0.0,50.0
NOMINAL FLUX(lm)	2112.77	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.0,50.0
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	0.75
TEST VOLTAGE(V)	277	η down(%)	100.0	CIBSE SHR MAX	0.85

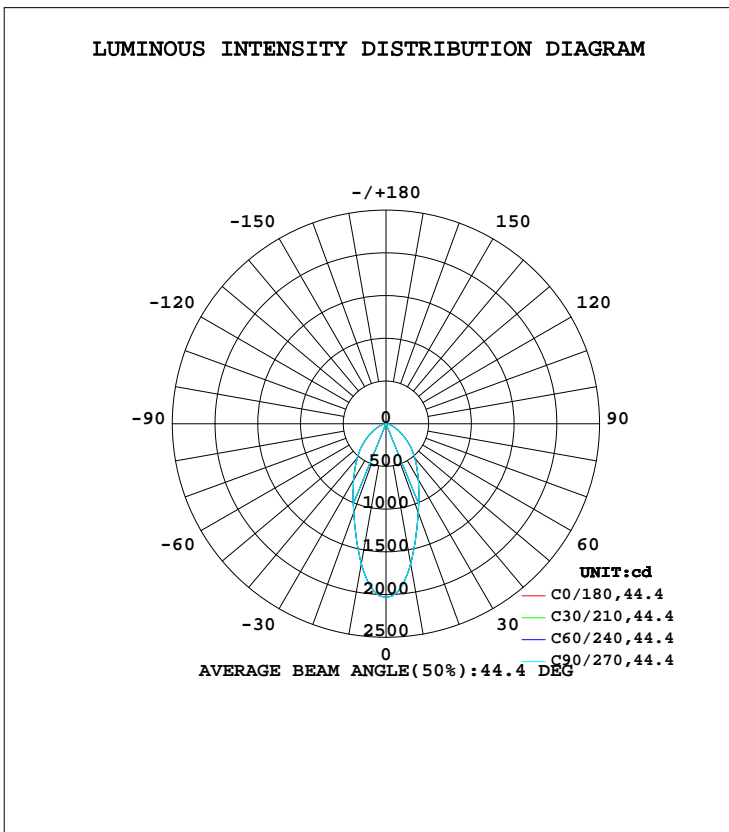

C Range: 0 - 0DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:13 November 2021

γ Range: 0 - 110DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.404.6
 Humidity:65.0%
 Test Distance:1.819m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	Φ lum,lamp
10	1664	1664	1664	1664	1664	1664	1664	1664	0- 10	175.7	175.7	8.31,8.31
20	1105	1105	1105	1105	1105	1105	1105	1105	10- 20	379.2	554.9	26.3,26.3
30	757.8	757.8	757.8	757.8	757.8	757.8	757.8	757.8	20- 30	419.9	974.7	46.1,46.1
40	524.9	524.9	524.9	524.9	524.9	524.9	524.9	524.9	30- 40	396.3	1371	64.9,64.9
50	337.2	337.2	337.2	337.2	337.2	337.2	337.2	337.2	40- 50	330.3	1701	80.5,80.5
60	180.0	180.0	180.0	180.0	180.0	180.0	180.0	180.0	50- 60	226.9	1928	91.3,91.3
70	79.44	79.44	79.44	79.44	79.44	79.44	79.44	79.44	60- 70	123.6	2052	97.1,97.1
80	23.06	23.06	23.06	23.06	23.06	23.06	23.06	23.06	70- 80	51.08	2103	99.5,99.5
90	0.6441	0.6441	0.6441	0.6441	0.6441	0.6441	0.6441	0.6441	80- 90	9.753	2113	100,100
100	0.0536	0.0536	0.0536	0.0536	0.0536	0.0536	0.0536	0.0536	90-100	0.1235	2113	100,100
110	0.0791	0.0791	0.0791	0.0791	0.0791	0.0791	0.0791	0.0791	100-110	0.0694	2113	100,100
120	0	0	0	0	0	0	0	0	110-120	0.0041	2113	100,100
130	0	0	0	0	0	0	0	0	120-130	0	2113	100,100
140	0	0	0	0	0	0	0	0	130-140	0	2113	100,100
150	0	0	0	0	0	0	0	0	140-150	0	2113	100,100
160	0	0	0	0	0	0	0	0	150-160	0	2113	100,100
170	0	0	0	0	0	0	0	0	160-170	0	2113	100,100
180	0	0	0	0	0	0	0	0	170-180	0	2113	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 0DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:13 November 2021

γ Range: 0 - 110DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.404.6
 Humidity:65.0%
 Test Distance:1.819m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:278.60V I:0.1635A P:42.454W PF:0.9321 Freq:59.98Hz Lamp Flux:2112.77x1 lm		
NAME: 8寸双发光 (单边数据)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.04*0.21M	Shielding Angle:

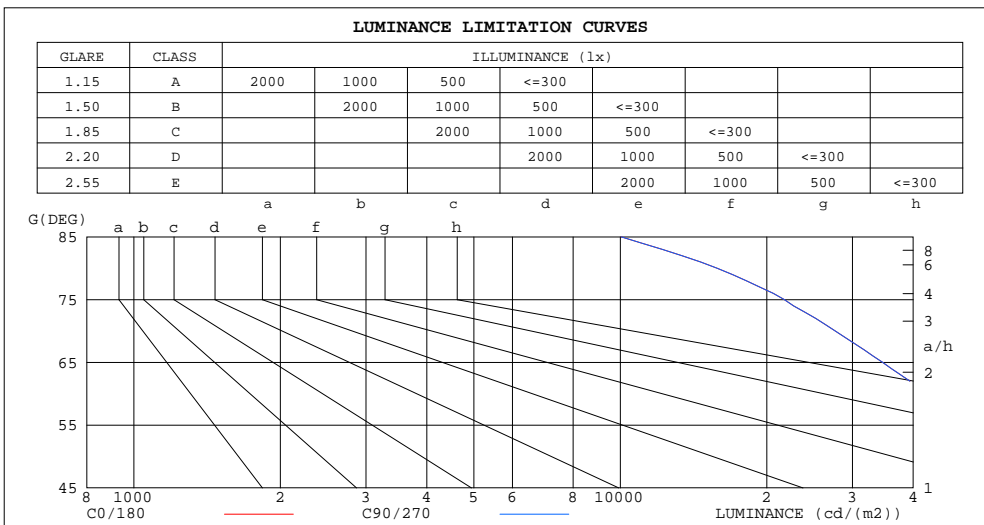

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	10036	10036
80	15808	15808
75	21731	21731
70	27652	27652
65	34585	34585
60	42856	42856
55	52403	52403
50	62453	62453
45	72104	72104


C Range: 0 - 0DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:13 November 2021

γ Range: 0 - 110DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.404.6
 Humidity:65.0%
 Test Distance:1.819m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:278.60V I:0.1635A P:42.454W PF:0.9321 Freq:59.98Hz Lamp Flux:2112.77x1 lm		
NAME: 8寸双发光 (单边数据)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.04*0.21M	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.08	1.04	1.02	1.06	1.03	.00	1.01	.99	.97	.98	.96	.94	.94	.93	.91	.89
2.0	.97	.92	.87	.95	.90	.86	.92	.88	.84	.89	.85	.82	.86	.83	.81	.79
3.0	.88	.81	.76	.86	.80	.76	.84	.79	.74	.81	.77	.73	.79	.75	.72	.70
4.0	.80	.73	.67	.79	.72	.67	.77	.71	.66	.74	.69	.65	.72	.68	.65	.63
5.0	.73	.66	.60	.72	.65	.60	.70	.64	.59	.68	.63	.59	.67	.62	.58	.57
6.0	.67	.60	.55	.67	.59	.54	.65	.59	.54	.63	.58	.53	.62	.57	.53	.51
7.0	.62	.55	.50	.62	.55	.50	.60	.54	.49	.59	.53	.49	.58	.53	.49	.47
8.0	.58	.51	.46	.57	.50	.45	.56	.50	.45	.55	.49	.45	.54	.49	.45	.43
9.0	.54	.47	.42	.53	.47	.42	.52	.46	.42	.51	.46	.42	.51	.45	.42	.40
10.0	.51	.44	.39	.50	.44	.39	.49	.43	.39	.48	.43	.39	.48	.42	.39	.37

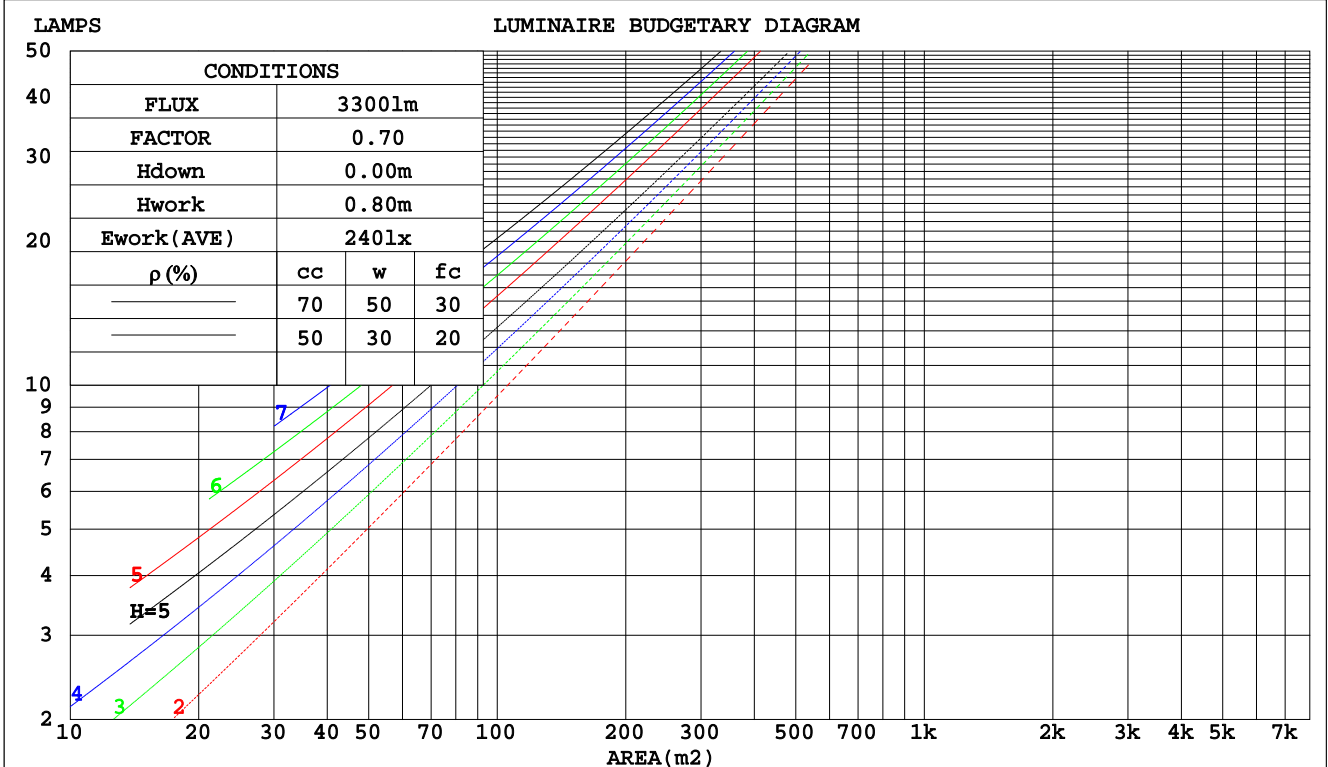

C Range: 0 - 0DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 13 November 2021

γ Range: 0 - 110DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.404.6
 Humidity: 65.0%
 Test Distance: 1.819m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:278.60V I:0.1635A P:42.454W PF:0.9321 Freq:59.98Hz Lamp Flux:2112.77x1 lm		
NAME: 8寸双发光 (单边数据)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.04*0.21M	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.236	.134	.042	.229	.131	.041	.216	.124	.040	.204	.118	.038	.193	.112	.036	
2.0	.227	.125	.038	.221	.122	.038	.210	.117	.036	.200	.112	.035	.190	.108	.034	
3.0	.215	.114	.034	.210	.112	.034	.200	.108	.033	.191	.105	.032	.183	.101	.031	
4.0	.202	.105	.031	.197	.103	.031	.189	.100	.030	.181	.097	.029	.174	.094	.029	
5.0	.190	.097	.028	.186	.095	.028	.178	.093	.027	.171	.090	.027	.165	.088	.026	
6.0	.178	.089	.026	.175	.088	.025	.168	.086	.025	.162	.084	.025	.156	.082	.024	
7.0	.168	.083	.024	.165	.082	.023	.159	.080	.023	.153	.079	.023	.148	.077	.023	
8.0	.158	.077	.022	.156	.077	.022	.150	.075	.021	.145	.074	.021	.141	.072	.021	
9.0	.150	.073	.020	.147	.072	.020	.143	.071	.020	.138	.069	.020	.134	.068	.020	
10.0	.142	.068	.019	.140	.068	.019	.136	.066	.019	.132	.065	.019	.128	.064	.018	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.191	.191	.191	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.175	.157	.140	.150	.135	.121	.103	.093	.084	.059	.054	.049	.019	.017	.016	
2.0	.164	.132	.106	.140	.114	.092	.096	.079	.064	.055	.046	.037	.018	.015	.012	
3.0	.154	.114	.082	.132	.098	.071	.091	.068	.050	.052	.040	.029	.017	.013	.010	
4.0	.145	.100	.065	.125	.086	.057	.086	.060	.040	.050	.035	.024	.016	.011	.008	
5.0	.137	.089	.053	.118	.077	.046	.081	.054	.033	.047	.032	.019	.015	.010	.006	
6.0	.130	.080	.044	.112	.070	.039	.077	.049	.027	.045	.029	.016	.014	.009	.005	
7.0	.124	.073	.037	.107	.063	.033	.074	.044	.023	.043	.026	.014	.014	.009	.005	
8.0	.118	.067	.032	.101	.058	.028	.070	.041	.020	.041	.024	.012	.013	.008	.004	
9.0	.112	.062	.028	.097	.054	.025	.067	.038	.017	.039	.022	.010	.013	.007	.003	
10.0	.107	.058	.025	.092	.050	.022	.064	.035	.015	.037	.021	.009	.012	.007	.003	

C Range: 0 - 0DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:13 November 2021

γ Range: 0 - 110DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.404.6
 Humidity:65.0%
 Test Distance:1.819m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:278.60V I:0.1635A P:42.454W PF:0.9321 Freq:59.98Hz Lamp Flux:2112.77x1 lm										
NAME: 8寸双发光 (单边数据)					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: EVERFINE					SUR.:0.04*0.21M			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.9	24.1	23.1	24.3	24.5	22.9	24.1	23.1	24.3	24.5
3H	23.4	24.6	23.7	24.8	25.0	23.4	24.6	23.7	24.8	25.0
4H	23.6	24.7	23.9	24.9	25.2	23.6	24.7	23.9	24.9	25.2
6H	23.7	24.7	24.0	24.9	25.2	23.7	24.7	24.0	24.9	25.2
8H	23.7	24.6	24.0	24.9	25.2	23.7	24.6	24.0	24.9	25.2
12H	23.6	24.6	24.0	24.8	25.1	23.6	24.6	24.0	24.8	25.1
4H 2H	23.1	24.2	23.4	24.4	24.7	23.1	24.2	23.4	24.4	24.7
3H	23.8	24.8	24.2	25.1	25.3	23.8	24.8	24.2	25.1	25.3
4H	24.1	24.9	24.4	25.2	25.5	24.1	24.9	24.4	25.2	25.5
6H	24.2	24.9	24.6	25.3	25.6	24.2	24.9	24.6	25.3	25.6
8H	24.2	24.9	24.6	25.3	25.6	24.2	24.9	24.6	25.3	25.6
12H	24.2	24.8	24.6	25.2	25.6	24.2	24.8	24.6	25.2	25.6
8H 4H	24.1	24.8	24.5	25.2	25.5	24.1	24.8	24.5	25.2	25.5
6H	24.3	24.9	24.7	25.3	25.7	24.3	24.9	24.7	25.3	25.7
8H	24.3	24.8	24.8	25.2	25.7	24.3	24.8	24.8	25.2	25.7
12H	24.3	24.8	24.8	25.2	25.7	24.3	24.8	24.8	25.2	25.7
12H 4H	24.1	24.7	24.5	25.1	25.5	24.1	24.7	24.5	25.1	25.5
6H	24.3	24.8	24.7	25.2	25.6	24.3	24.8	24.7	25.2	25.6
8H	24.3	24.8	24.8	25.2	25.7	24.3	24.8	24.8	25.2	25.7
Variations with the observer position at spacings:										
S = 1.0H	+ 0.5 / - 0.7					+ 0.5 / - 0.7				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 1.1 / - 1.1					+ 1.1 / - 1.1				

CIE Pub.117, 2113 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 2.6)

C Range: 0 - 0DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:13 November 2021

γ Range: 0 - 110DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.404.6
 Humidity:65.0%
 Test Distance:1.819m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:278.60V I:0.1635A P:42.454W PF:0.9321 Freq:59.98Hz Lamp Flux:2112.77x1 lm		
NAME: 8寸双发光 (单边数据)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.04*0.21M	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	69	60	54	69	60	54	68	59	54	49
0.80	79	70	64	78	69	64	77	69	63	58
1.00	86	78	72	85	77	72	83	78	71	65
1.25	92	84	79	91	84	79	89	82	78	72
1.50	96	89	84	95	88	83	92	87	82	76
2.00	102	95	90	100	94	90	97	92	88	82
2.50	104	99	94	103	97	93	99	95	91	84
3.00	107	102	98	105	100	97	101	98	94	87
4.00	110	106	102	108	104	101	104	101	98	90
5.00	112	108	105	109	106	104	105	103	101	92
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 0DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:13 November 2021

γ Range: 0 - 110DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.404.6
 Humidity:65.0%
 Test Distance:1.819m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:278.60V I:0.1635A P:42.454W PF:0.9321 Freq:59.98Hz Lamp Flux:2112.77x1 lm		
NAME: 8寸双发光 (单边数据)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.04*0.21M	Shielding Angle:

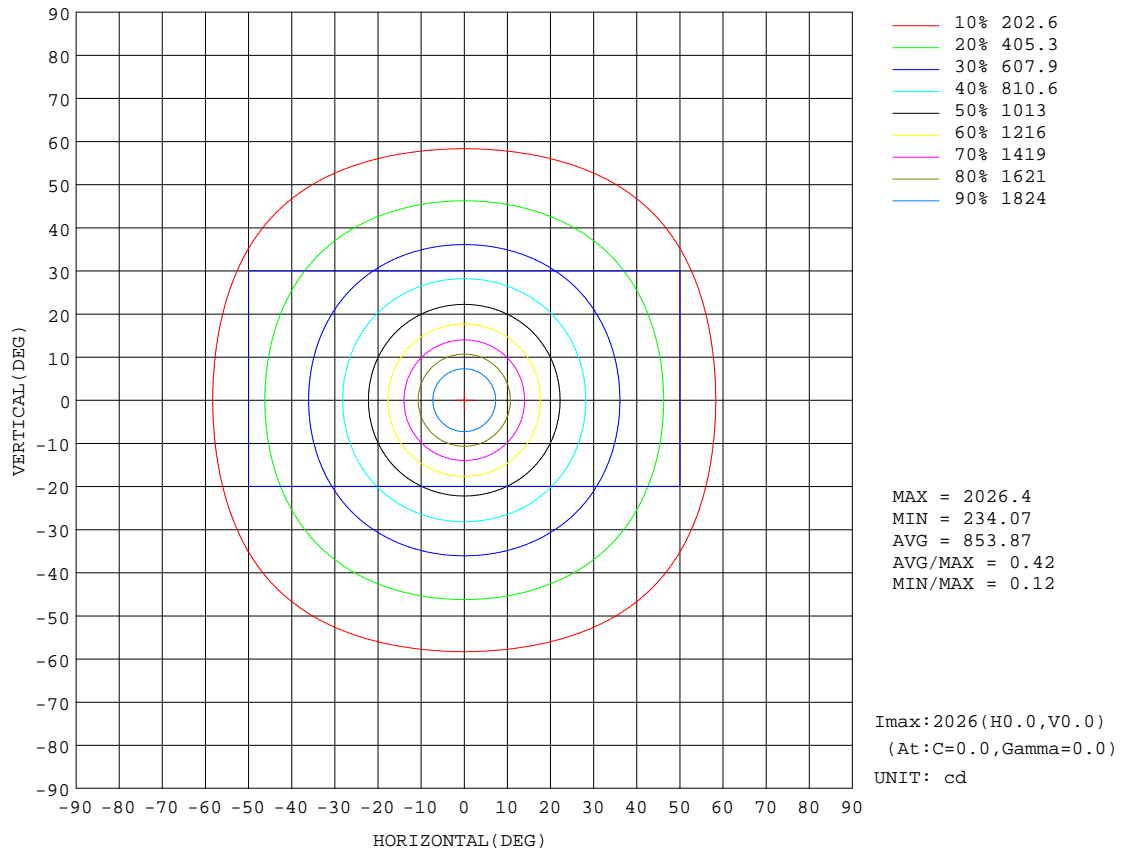


C Range: 0 - 0DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 13 November 2021

γ Range: 0 - 110DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.404.6
 Humidity: 65.0%
 Test Distance: 1.819m [K=1.0000]
 Remarks:

AAI Figure

Test:U:278.60V I:0.1635A P:42.454W PF:0.9321 Freq:59.98Hz Lamp Flux:2112.77x1 lm		
NAME: 8寸双发光 (单边数据)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.04*0.21M	Shielding Angle:

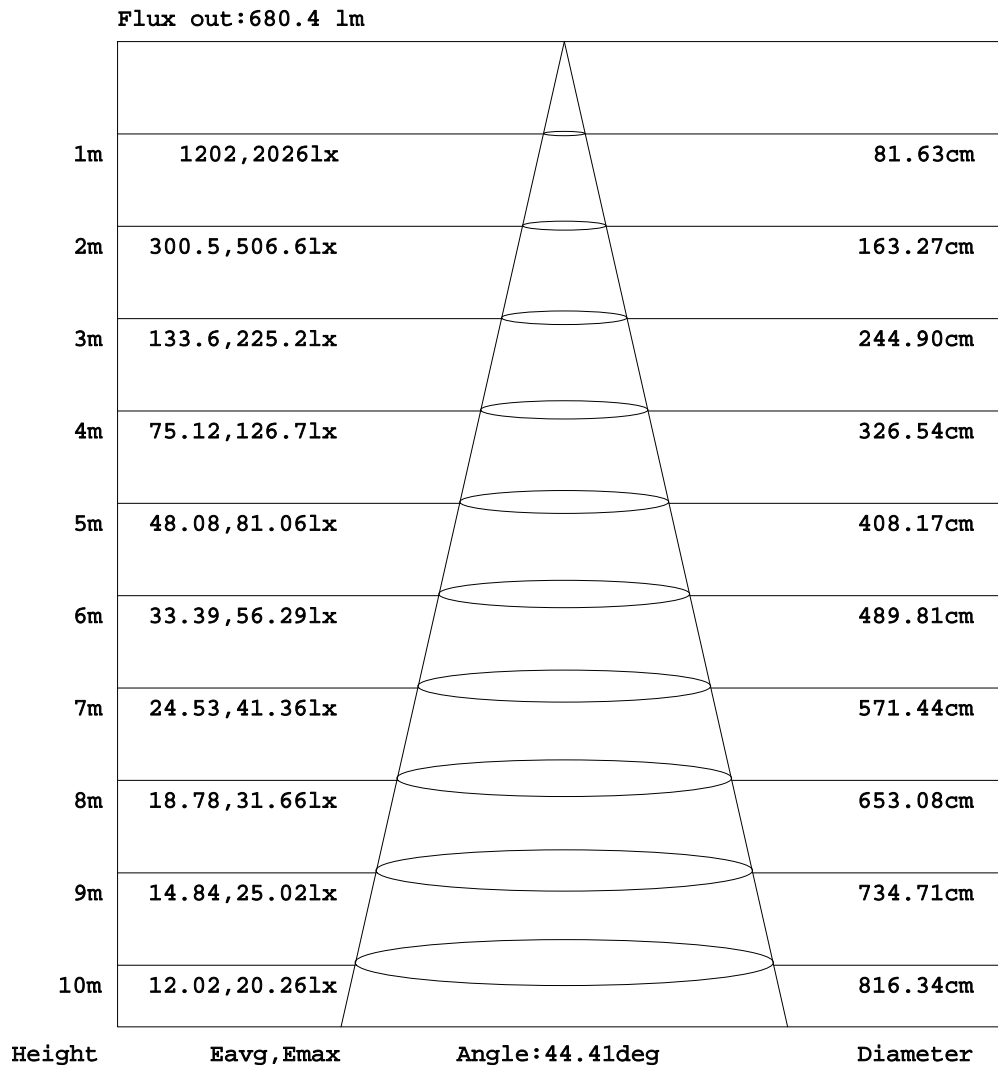


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 0DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:13 November 2021

γ Range: 0 - 110DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.404.6
 Humidity:65.0%
 Test Distance:1.819m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:278.60V I:0.1635A P:42.454W PF:0.9321 Freq:59.98Hz Lamp Flux:2112.77x1 lm		
NAME: 8寸双发光 (单边数据)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.04*0.21M	Shielding Angle:

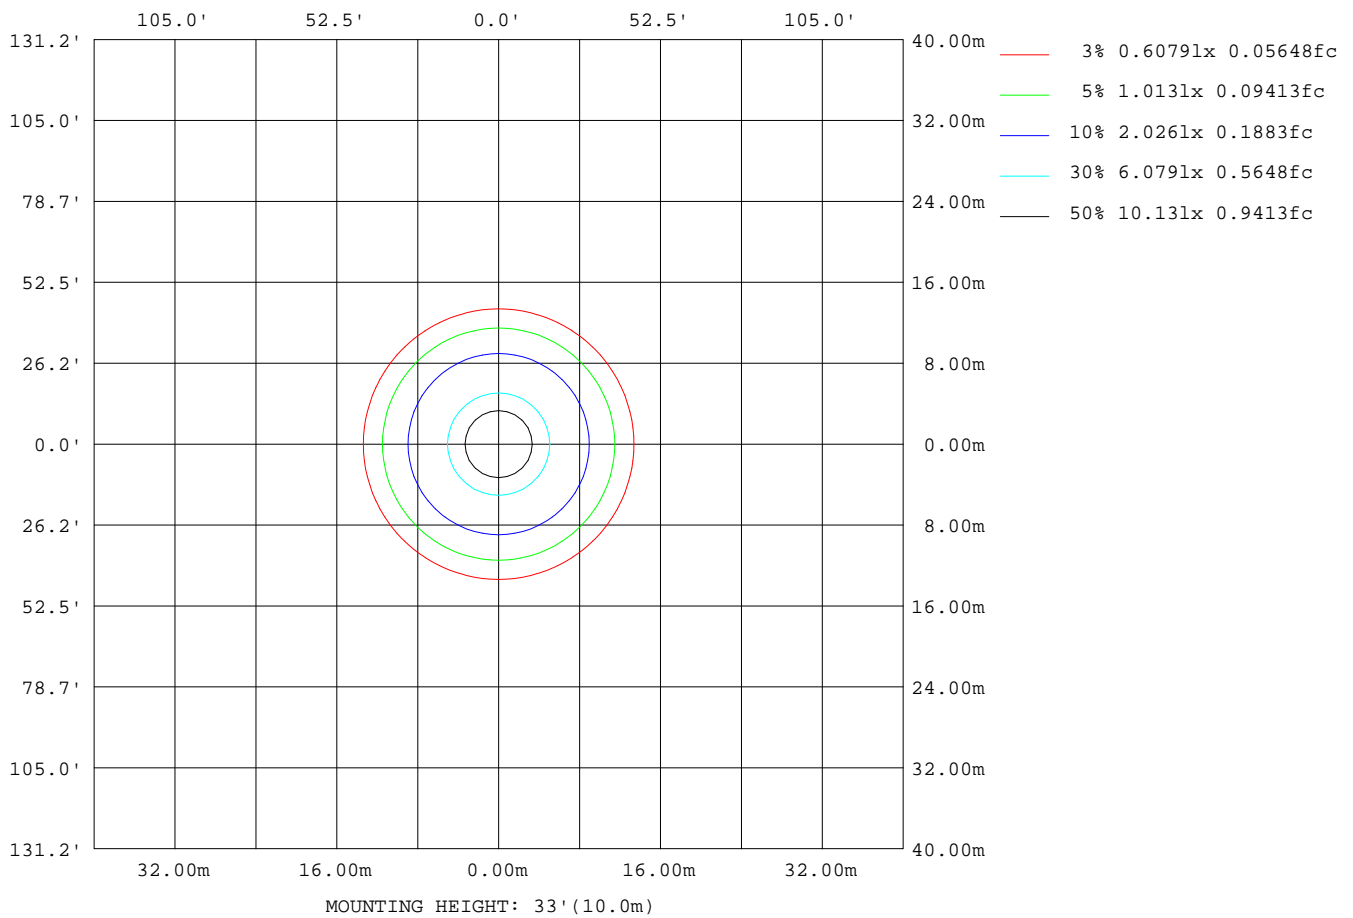

C Range: 0 - 0DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:13 November 2021

γ Range: 0 - 110DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.404.6
 Humidity:65.0%
 Test Distance:1.819m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:278.60V I:0.1635A P:42.454W PF:0.9321 Freq:59.98Hz Lamp Flux:2112.77x1 lm		
NAME: 8寸双发光 (单边数据)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.04*0.21M	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	34585
L_0~180(75)av	21731
L_0~180(85)av	10036
L_90~270(65)av	34585
L_90~270(75)av	21731
L_90~270(85)av	10036
L_45(65)av	34585
L_45(75)av	21731
L_45(85)av	10036

Standard: GB/T 29293-2012

C Range: 0 - 0DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:13 November 2021

γ Range: 0 - 110DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.404.6
 Humidity:65.0%
 Test Distance:1.819m [K=1.0000]
 Remarks:

Planar Illuminance Curve

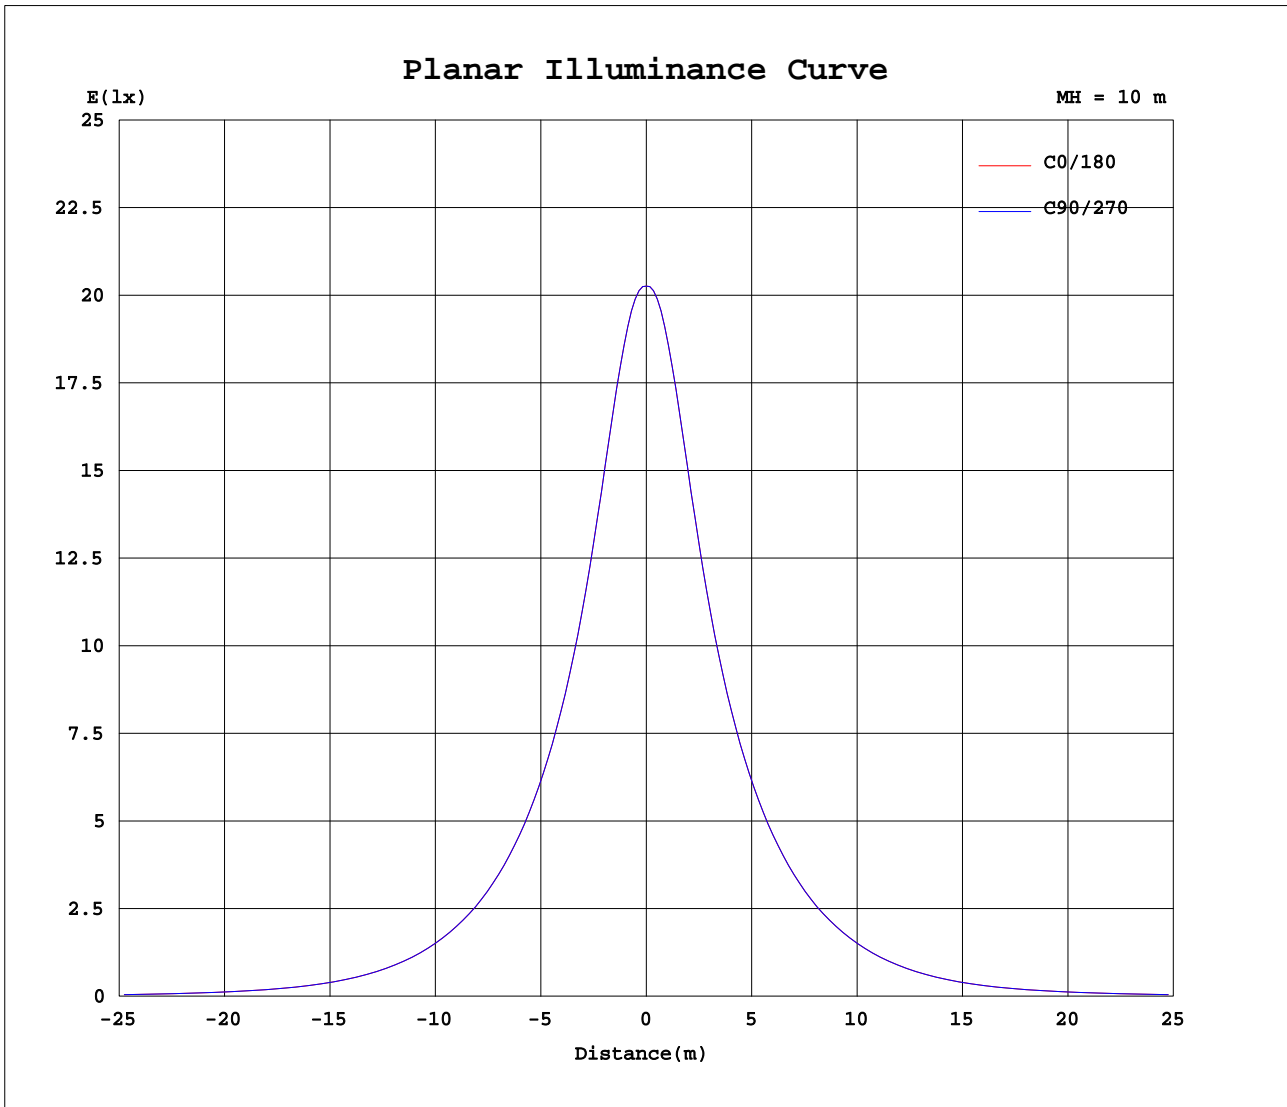

C Range: 0 - 0DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 13 November 2021

γ Range: 0 - 110DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.404.6
 Humidity: 65.0%
 Test Distance: 1.819m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:278.60V I:0.1635A P:42.454W PF:0.9321 Freq:59.98Hz Lamp Flux:2112.77x1 lm		
NAME: 8寸双发光 (单边数据)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.04*0.21M	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	2026	2026	2026	2026	2026	2026	2026	2026	2026	2026	2026	2026						
5	1932	1932	1932	1932	1932	1932	1932	1932	1932	1932	1932	1932						
10	1664	1664	1664	1664	1664	1664	1664	1664	1664	1664	1664	1664						
15	1359	1359	1359	1359	1359	1359	1359	1359	1359	1359	1359	1359						
20	1105	1105	1105	1105	1105	1105	1105	1105	1105	1105	1105	1105						
25	911	911	911	911	911	911	911	911	911	911	911	911						
30	758	758	758	758	758	758	758	758	758	758	758	758						
35	633	633	633	633	633	633	633	633	633	633	633	633						
40	525	525	525	525	525	525	525	525	525	525	525	525						
45	428	428	428	428	428	428	428	428	428	428	428	428						
50	337	337	337	337	337	337	337	337	337	337	337	337						
55	252	252	252	252	252	252	252	252	252	252	252	252						
60	180	180	180	180	180	180	180	180	180	180	180	180						
65	123	123	123	123	123	123	123	123	123	123	123	123						
70	79.4	79.4	79.4	79.4	79.4	79.4	79.4	79.4	79.4	79.4	79.4	79.4						
75	47.2	47.2	47.2	47.2	47.2	47.2	47.2	47.2	47.2	47.2	47.2	47.2						
80	23.1	23.1	23.1	23.1	23.1	23.1	23.1	23.1	23.1	23.1	23.1	23.1						
85	7.35	7.35	7.35	7.35	7.35	7.35	7.35	7.35	7.35	7.35	7.35	7.35						
90	0.64	0.64	0.64	0.64	0.64	0.64	0.64	0.64	0.64	0.64	0.64	0.64						
95	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04						
100	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05						
105	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07						
110	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08						
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						

C Range: 0 - 0DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:13 November 2021

γ Range: 0 - 110DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.404.6
 Humidity:65.0%
 Test Distance:1.819m [K=1.0000]
 Remarks: