


AAI Figure

Test:U:120.30V I:0.6242A P:74.882W PF:0.9971 Freq:60.01Hz Lamp Flux:10076.4x1 lm		
NAME: WALL PACK	TYPE: LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	COSϑLFD	Shielding Angle:

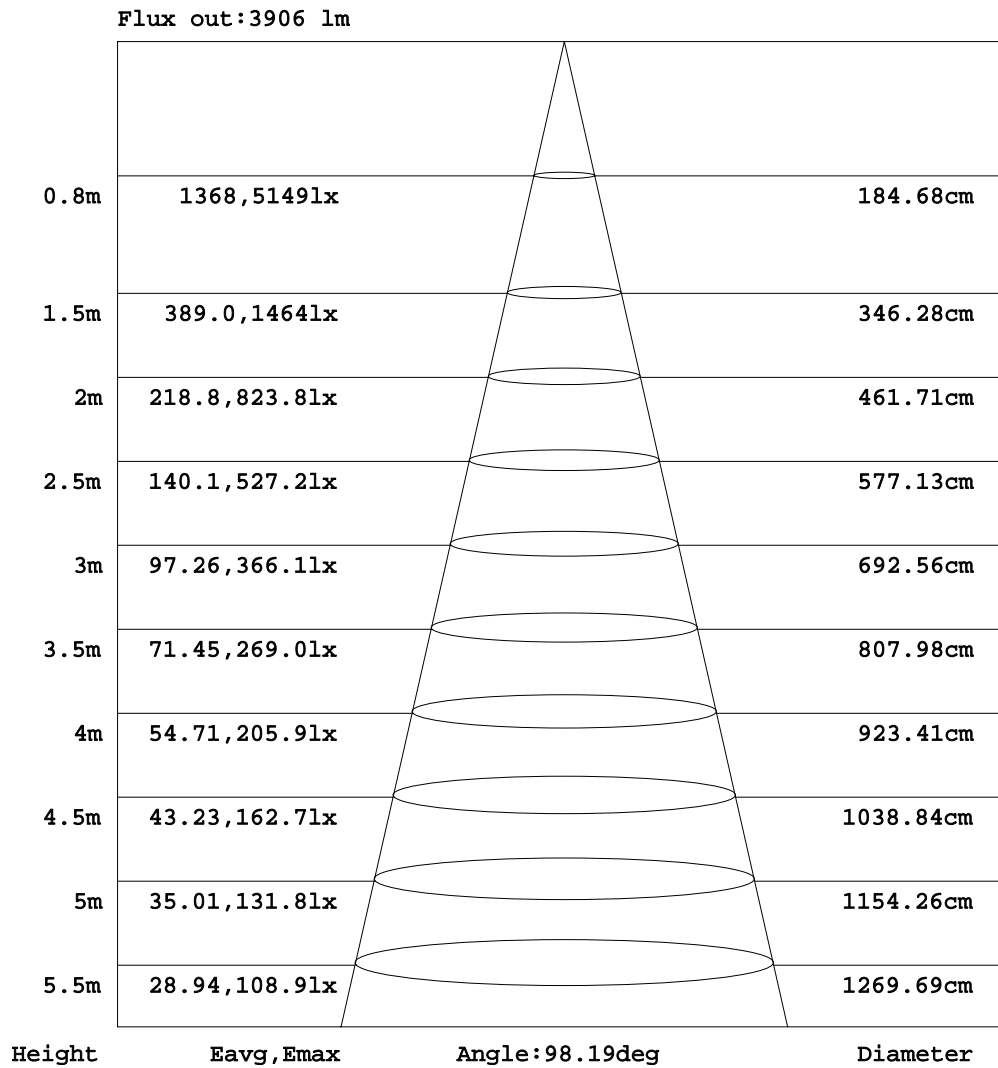

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:24.9DEG
 Operators:Alan Wang
 Test Date:16 May 2020

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.426
 Humidity:51.6%
 Test Distance:2.500m [K=0.9942]
 Remarks: